



Jabiru Aircraft

Model J160-C

PILOT'S OPERATING HANDBOOK & APPROVED FLIGHT MANUAL

THIS DOCUMENT MUST BE CARRIED IN THE AIRCRAFT AT ALL TIMES

Approved:

Australia for the Civil Aviation Safety Authority Australia



Date:

22/1/2009

Manufacturer: Jabiru Aircraft Pty Ltd
Airport Drive
Bundaberg Queensland 4670
Australia

Phone: +61 7 4155 1778
Facsimile: +61 7 4155 2669

Document No: JP-FM-06

This page intentionally left blank



CASA APPROVED

Jabiru Aircraft
Model J160-C

AIRCRAFT PARTICULARS

*THIS AIRCRAFT MUST BE OPERATED IN ACCORDANCE WITH THE APPROVED
DATA AND LIMITATIONS CONTAINED IN THIS MANUAL AT ALL TIMES.*

Registration Marks: _____

Manufacturer: Jabiru Aircraft Pty Ltd

Aircraft Serial Number: _____

Certification Categories: Primary

Any person finding this Manual is requested to return it to the nearest
District Office of the Civil Aviation Safety Authority.

This page intentionally left blank



AMENDMENT RECORD SHEET

Amendment Date	Affected Sections	Affected Pages	Date Inserted	Signature
21 Sep 2006	0, 1, 2, 3, 4, 6 & 7	1-9 2-10 to 2-14, 3-6 & 3-7 4-5 & 4-7 6-10, 6-14 to 6-16 7-2 & 7-3, 7-8, 7-9, 7-11, 7-12		
8 th Mar 2007	0, 2, & 4	2-1, 2-2, 2-3, 2-4 4-1, 4-4, 4-5, 4-7, 4-9		
1 st Dec 2008	0, 1, 4 & 7	lii, 1-4, 2-2, 2-3, 2-5, 2-10, 4-9, 6-15, 7-5, 8-2		

This page intentionally left blank



LOG OF EFFECTIVE PAGES

Page	Date	Page	Date	Page	Date
(i)*	1 st December 2008	4-1*	1 st December 2008	7-1	1 st December 2008
(ii)*	1 st December 2008	4-2*	1 st December 2008	7-2	1 st December 2008
(iii)*	1 st December 2008	4-3*	1 st December 2008	7-3	1 st December 2008
(iv)*	1 st December 2008	4-4*	1 st December 2008	7-4	1 st December 2008
(v)*	1 st December 2008	4-5*	1 st December 2008	7-5	1 st December 2008
		4-6*	1 st December 2008	7-6	1 st December 2008
1-1	21 September 2006	4-7*	1 st December 2008	7-7	1 st December 2008
1-2	21 September 2006	4-8*	1 st December 2008	7-8	1 st December 2008
1-3	21 September 2006	4-9*	1 st December 2008	7-9	1 st December 2008
1-4	21 September 2006	4-10*	1 st December 2008	7-10	1 st December 2008
1-5	21 September 2006	4-11*	1 st December 2008	7-11	1 st December 2008
1-6	21 September 2006	4-12*	1 st December 2008	7-12	1 st December 2008
1-7	21 September 2006			7-13	1 st December 2008
1-8	21 September 2006	5-1*	21 December 2005	7-14	1 st December 2008
1-9	21 September 2006	5-2*	21 December 2005		
1-10	21 September 2006	5-3*	21 December 2005	8-1	21 December 2005
		5-4*	21 December 2005	8-2	21 December 2005
2-1*	8 th March 2007	5-5*	21 December 2005	8-3	21 December 2005
2-2*	8 th March 2007	5-6*	21 December 2005	8-4	21 December 2005
2-3*	8 th March 2007	5-7*	21 December 2005	8-5	21 December 2005
2-4*	8 th March 2007	5-8*	21 December 2005	8-6	21 December 2005
2-5*	8 th March 2007	5-9*	21 December 2005	8-7	21 December 2005
2-6*	8 th March 2007	5-10*	21 December 2005	8-8	21 December 2005
2-7*	8 th March 2007			8-9	21 December 2005
2-8*	8 th March 2007	6-1	21 September 2006	8-10	21 December 2005
2-9*	8 th March 2007	6-2	21 September 2006		
2-10*	8 th March 2007	6-3	21 September 2006	9-1	21 December 2005
2-11*	8 th March 2007	6-4	21 September 2006	9-2	21 December 2005
2-12*	8 th March 2007	6-5	21 September 2006		
2-13*	8 th March 2007	6-6	21 September 2006		
2-14*	8 th March 2007	6-7	21 September 2006		
		6-8	21 September 2006		
		6-9	21 September 2006		
		6-10	21 September 2006		
3-1*	21 September 2006	6-11	21 September 2006		
3-2*	21 September 2006	6-12	21 September 2006		
3-3*	21 September 2006	6-13	21 September 2006		
3-4*	21 September 2006	6-14	21 September 2006		
3-5*	21 September 2006	6-15	21 September 2006		
3-6*	21 September 2006	6-16	21 September 2006		
3-7*	21 September 2006	6-17	21 September 2006		
3-8*	21 September 2006				
3-9*	21 September 2006				
3-10*	21 September 2006				
3-11*	21 September 2006				

*indicates APPROVED pages

Approved by the Civil Aviation Safety Authority Australia

Date: 22/1/2009

This page intentionally left blank



CONTENTS

Section

- 1 General
- 2 Limitations (*CASA Approved*)
- 3 Emergency Procedures (*CASA Approved*)
- 4 Normal Procedures (*CASA Approved*)
- 5 Performance (*CASA Approved*)
- 6 Weight and Balance/Equipment List
- 7 Aircraft and Systems Description
- 8 Aircraft Handling, Servicing and Maintenance
- 9 Supplements

This page intentionally left blank



SECTION 1

GENERAL

TABLE OF CONTENTS

Paragraph		Page
1.1	INTRODUCTION.....	1-2
1.1.1	Pilot's Operating Handbook (POH).....	1-2
1.2	CERTIFICATION BASIS.....	1-3
1.3	WARNINGS, CAUTIONS & NOTES.....	1-3
1.4	DESCRIPTIVE DATA.....	1-3
1.4.1	Aircraft.....	1-3
1.4.2	Engine.....	1-4
1.5	THREE-VIEW DRAWING.....	1-4
1.6	SYMBOLS, ABBREVIATIONS AND TERMINOLOGY.....	1-5
1.6.1	General Symbols and Abbreviations.....	1-5
1.6.2	General Airspeed Terminology and Symbols.....	1-7
1.6.3	Meteorological Terminology.....	1-8
1.6.4	Power Terminology.....	1-8
1.6.5	Engine Controls and Instruments.....	1-8
1.6.6	Aircraft Performance and Flight Planning Terminology.....	1-8
1.6.7	Weight and Balance Terminology.....	1-9
1.7	USE OF METRIC/IMPERIAL UNITS.....	1-10

1.1 INTRODUCTION

This Operating Handbook consists of an introductory section and nine additional numbered sections and has been prepared to comply with the requirements of CS-VLA. Sections 2, 3, 4 and 5 are Civil Aviation Safety Authority (CASA) of Australia approved and comprise the Approved Flight Manual. These pages, together with the remainder of the manual, comprise the Pilots Operating Handbook.

The basic handbook provides all the information, procedures and limitations required to operate the aircraft in the Primary Category. Information, procedures and limitations relating specifically to other operations are provided in the appropriate supplement in Section 9.

The operating procedures presented herein are the result of Jabiru Aircrafts' knowledge and experience gained up to the date of issue or amendment of this handbook. The handbook is not intended to be a guide for basic flight instruction or as a training manual. It may be used for operational purposes only if kept in a fully amended state. It contains all the information considered necessary to safely operate the aircraft.

The operator must be thoroughly familiar with the aircraft and the contents of this handbook before initial operation. Thereafter the handbook should be reviewed periodically to enable the operator to maintain the highest level of familiarity with the aircraft, its controls and recommended operating procedures.

1.1.1 Pilot's Operating Handbook (POH)

The handbook is valid **only for the particular aircraft** identified on page (ii), the FLIGHT MANUAL APPROVAL page, and unless subsequently amended, refers to the aircraft as originally delivered from the factory. The handbook consists of the following:

Basic POH

The basic POH provides all required details of the standard aircraft and the procedures required to operate it in the primary category. Apart from the listing in Section 6, no other details of any optional equipment fitted at the factory will be found in the basic POH. Refer to the relevant supplement.

Supplements

Self contained supplements are provided in SECTION 9 of the POH to provide details and procedures associated with the fitment of specified optional and special purpose equipment.

Amendments

Any amendments to any page of the POH is to have an amendment date. All amendments are to be incorporated as soon as possible after their receipt and details entered into the appropriate amendment record sheet.

1.2 CERTIFICATION BASIS

This Handbook includes the material required to be furnished to the pilot by European Aviation Safety Agency specification CS-VLA amendment 0 in order to comply with Primary Category requirements. The Jabiru model J160-C aircraft has been certificated by the Civil Aviation Safety Authority of Australia in the Primary Category.

CASA Type Certificate Number: _____VA515

Category of Airworthiness: _____Primary

Noise Certification Basis: _____Permit Issued by Air Services Australia

1.3 WARNINGS, CAUTIONS & NOTES

Definitions used in the POH such as **WARNING**, **CAUTION**, **NOTE** are employed in the following context:

WARNING

Operating procedures, techniques, etc. which if not followed correctly, may result in personal injury or death.

CAUTION

Operating procedures, techniques, etc. which if not strictly observed, may result in damage to the aircraft or to its installed equipment.

NOTE

Operating procedures, techniques, etc. which it is considered essential to highlight.

1.4 DESCRIPTIVE DATA

1.4.1 Aircraft

The J160 aircraft is a strut braced, high wing, fixed tricycle undercarriage, single engine, two seat aircraft that has been designed primarily for training and recreational operations.

The fuselage, wings and empennage are constructed from composite materials. A single integral fuel tank is located in each wing, supplying the engine through a header tank located below the baggage shelf.

The cockpit is designed to accommodate the pilot in command on the left side and all controls, instruments, selectors and switches are located so as to be within easy reach of the occupant of that seat. Conventional 3 axis flight controls, and variable wing flaps are provided. Duplicated flight controls are provided on the right side of the cockpit. The centrally located control pedestal and radio stack are accessible from either of the two cockpit seats.

The cockpit is accessed by forward hinging doors that are located on each side. A baggage compartment is located behind the pilots' seats.

1.4.2 Engine

The engine is a four cylinder, horizontally opposed, air cooled, naturally aspirated Jabiru 2200B or 2200C, fitted with an altitude compensating carburettor. Both engines are rated by the manufacturer to 80 BHP at full throttle and 3300 RPM.

1.5 THREE-VIEW DRAWING

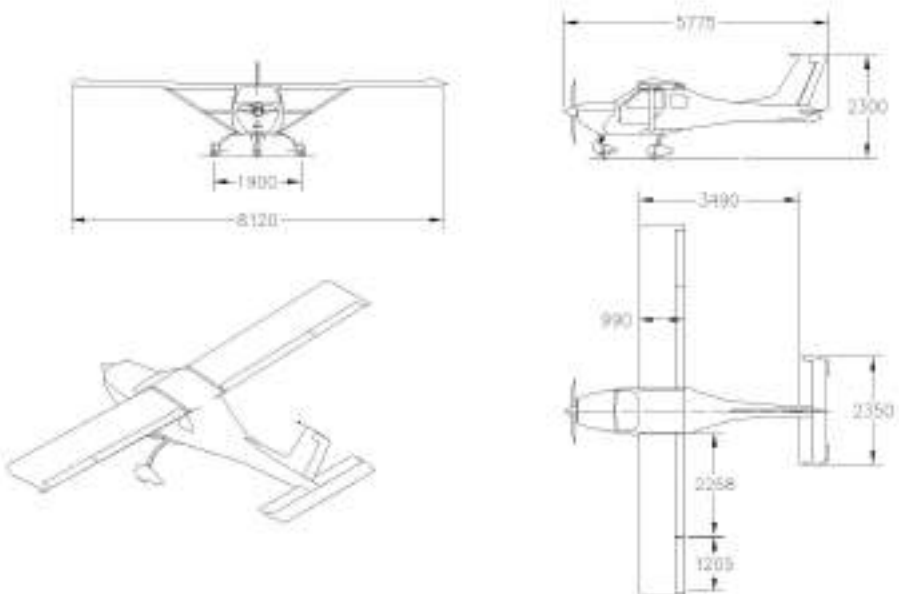


Figure 1-1 Three View of the J160

Note: All dimensions in millimetres

1.6 SYMBOLS, ABBREVIATIONS AND TERMINOLOGY

1.6.1 General Symbols and Abbreviations

A	Ampere
AGL	Above Ground Level
AMSL	Above Mean Sea Level
AVGAS	Aviation Gasoline
BHP	Brake Horse Power
CASA	Civil Aviation Safety Authority (Australia)
CAO	Civil Aviation Order (Australia)
CAR	Civil Aviation Regulation (Australia)
°C	Degrees Celsius
CHT	Cylinder Head Temperature
cm	Centimetre, centimetres
DC	Direct Current
E	East
EMERG	Emergency
FAA	Federal Aviation Administration (USA)
°F	Degrees Fahrenheit
FAR	Federal Aviation Regulation (USA)
ft	Foot, feet
ft/min	Feet per minute
g	Acceleration due to gravity
Gal	Gallon
GAMA	General Aviation Manufacturers Association
hPa	Hectopascal, hectopascals
HF	High Frequency
ICAO	International Civil Aviation Organisation
ICO	Idle Cut Off
IFR	Instrument Flight Rules
IMC	Instrument Meteorological Conditions
in	Inch, inches
in Hg	Inches of mercury
in lbs	Inch pounds
incr.	increase
ISA	International Standard Atmosphere
kg	Kilogram
kg/l	Kilogram per litre
kHz	Kilohertz
kts, K	Knots
kPa	Kilopascals
kW	Kilowatt, kilowatts
l	Litre, litres
lb	Pound, pounds
LH	Left hand
LHS	Left hand side

m	Metre
m²	Square metre
m³	Cubic metre
mA	Milli ampere
MAC	Mean Aerodynamic Chord
MAN	Manual
MAP	Manifold Air Pressure
max	Maximum
MCP	Maximum Continuous Power
MHz	Megahertz
mm	Millimetre
min	Minimum or minute
m kg	Metre kilogram
MOGAS	Automotive Fuel
N	North
NM	Nautical mile, nautical miles
OAT	Outside Air Temperature
PAX	Passenger
POH	Pilots Operating Handbook
PPH	Pounds per hour
PPM	Parts per million
PROP	Propeller
psi	Pounds per square inch
PWR	Power
QTY	Quantity
qts	Quarts
RH	Right Hand
RHS	Right Hand Side
RON	Fuel Octane Rating Scale
RPM	Revolutions per minute
S	South
SAE	Society of Automotive Engineers
sec	Seconds
SPKR	Speaker
SQ	Square
SSB	Single Side Band
STBY	Standby
SYST	System
TBO	Time between overhauls
T/O	Take Off
US	United States (of America)
U/S	Unserviceable
USA	United States of America
USG	US Gallon
US Gal	US Gallon
V	Volts
VFR	Visual Flight Rules
VHF	Very High Frequency
VMC	Visual Meteorological Conditions
W	West

1.6.2 General Airspeed Terminology and Symbols

- **CAS** *Calibrated Airspeed:* the indicated speed of an aircraft corrected for position and instrument error. Calibrated airspeed is equal to true airspeed in standard atmosphere at sea level.
- **KCAS:** Calibrated Airspeed expressed in knots.
- **GS** *Ground Speed:* the speed of an aircraft relative to the ground.
- **IAS** *Indicated Airspeed:* the speed of an aircraft as shown on the airspeed indicator. IAS values in this manual assume zero instrument error.
- **KIAS** Indicated Airspeed expressed in knots.
- **TAS** *True Air Speed:* the airspeed of an aircraft relative to the undisturbed air through which it passes.
- **T.O.S.S** *Take-Off Safety Speed:* the airspeed chosen to ensure that adequate control will exist under all conditions, including turbulence and sudden and complete engine failure during the climb after take-off. It is the speed required at 50 feet.
- **V_A** *Manoeuvring Speed:* the maximum speed at which application of full available aerodynamic control will not damage or overstress the aircraft.
- **V_{FE}** *Maximum Flap Extended Speed:* the highest speed permissible with wing flaps in a prescribed extended position.
- **V_{NE}** *Never Exceed Speed:* the limiting airspeed that may not be exceeded at any time.
- **V_{NO}** *Maximum Structural Cruising Speed:* the speed that should not be exceeded except in smooth air and then only with caution.
- **V_S** *Stalling Speed:* or the minimum steady flight speed at which the aircraft is controllable.
- **V_{SO}** *Stalling Speed:* or the minimum steady flight speed at which the aircraft is controllable in the landing configuration.
- **V_X** *Best Angle-of-Climb Speed:* the airspeed which delivers the greatest gain of altitude in the shortest possible horizontal distance.
- **V_Y** *Best Rate-of-Climb Speed:* the airspeed which delivers the greatest gain in altitude in the shortest possible time.
- **V_{REF}** *Reference Landing Approach Speed:* the airspeed equal to $1.3V_{SO}$ and is the airspeed used on approach down to 50 feet above the runway when determining landing distances.

1.6.3 Meteorological Terminology

- **ISA** – *International Standard Atmosphere* in which:

The air is a dry perfect gas:

The temperature at sea level is 15°C (59°F) :

The pressure at sea level is 1013 hPa (29.92 inches Hg) :

The temperature gradient from sea level to the altitude at which the temperature is -56.5° C (-69.7° F) is 0.00198° C (0 .003566° F) per foot, and zero above that altitude.

- **OAT** – *Outside Air Temperature* – the outside free air static temperature.
- **Airfield Pressure Height** – The height registered at the surface of an aerodrome by an altimeter with the pressure sub-scale set to 1013 hPa (29.92 inches Hg).
- **Pressure Altitude** – Altitude measured from standard sea-level pressure (1013 hPa/29.92 inches Hg) by a pressure or barometric altimeter corrected for position and instrument error.
- **Indicated Pressure Altitude** – the altitude actually read from an altimeter when the pressure barometric sub-scale has been set to 1013 hPa (29.92 inches Hg).
- **Station Pressure** – Actual atmospheric pressure at field elevation.
- **QNH** – The local pressure setting that if set on the subscale of an altimeter will cause the altimeter to indicate local altitude above mean sea level.
- **Wind** – The wind velocities to be used as variables on aircraft performance are to be understood as the headwind or tail wind components of the reported winds.

1.6.4 Power Terminology

- **Take-Off Power** – Maximum power permissible for take-off.
- **Maximum Continuous Power** – Maximum power that is allowed to be used continuously during flight.

1.6.5 Engine Controls and Instruments

- **Throttle** – The control which the pilot uses to control the engine RPM.
- **Tachometer** – The instrument that indicates the engine RPM.

1.6.6 Aircraft Performance and Flight Planning Terminology

- **Climb Gradient** – The ratio of the change in height during a climb, to the horizontal distance travelled.
- **Demonstrated Crosswind Component** – The crosswind component, during take-off and landing, for which adequate control of aircraft was actually demonstrated during certification tests.

1.6.7 Weight and Balance Terminology

- **Reference Datum** – An imaginary vertical plane from which all horizontal distances are measured for balance purposes.
- **Station** – A location along the aircraft fuselage usually given in terms of distance from the reference datum.
- **Arm** – The horizontal distance from the reference datum to the centre of gravity (C of G) of an item.
- **Moment** – The product of the weight of an item multiplied by its arm.
- **Index Unit** – Moment divided by a constant. Used to simplify balance calculations by reducing the number of digits.
- **Centre of Gravity (C of G)** – The point at which an aircraft would balance if suspended. The distance from the C of G to the reference datum can be found by dividing the total moment by the total weight of the aircraft.
- **C of G Arm** – The arm obtained by adding the aircraft's individual moments and dividing the sum by the total weight.
- **C of G Limits** – The extreme centre of gravity locations within which the aircraft must be operated at a given weight.
- **Useable Fuel** – The quantity of fuel available for flight planning purposes.
- **Unusable Fuel** – The quantity of fuel (determined under adverse fuel flow conditions) that is not available for flight.
- **Empty Weight** – Weight of aircraft with unusable fuel and full oil.
- **Useful Load** – Difference between take-off weight, and basic empty weight.
- **Maximum Take-Off Weight** – Maximum weight approved for take-off.
- **Maximum Landing Weight** – Maximum weight approved for the landing.
- **Header Tank** – Fuel tank plumbed between the wing tanks and the engine. Also known as **Collector Tank** or **Sump Tank**.

1.7 USE OF METRIC/IMPERIAL UNITS

This POH uses the metric system as the basic system of measurement. Where common usage or available instrumentation refer to the Imperial/US unit system, both units are quoted. The following conversion factors are presented as a ready reference to the conversion factors that have been used in this manual as well as supplying some others that may be found useful.

1 Pound (lb)	=	0.4536 Kilogram (kg)
1 Pound per sq in (psi)	=	6.895 Kilopascal (kPa)
1 Inch (in)	=	25.4 Millimetres (mm)
1 Foot (ft)	=	0.3048 Metre (m)
1 Statute mile	=	1.609 Kilometres (km)
1 Nautical mile (NM)	=	1.852 Kilometres (km)
1 Millibar (mb)	=	1 Hectopascal (hPa)
1 Millibar (mb)	=	0.1 Kilopascal (kPa)
1 Imperial gallon	=	4.546 Litres (l)
1 US gallon	=	3.785 Litres (l)
1 US quart	=	0.946 Litre (l)
1 Cubic foot (ft ³)	=	28.317 Litres (l)
1 Acre	=	0.4047 Hectares
1 Degree Fahrenheit (EF)	=	[1.8 x EC]+32
1 Inch Pound (in lb)	=	0.113 Newton Metres (Nm)
1 Foot Pound (ft lb)	=	1.356 Newton Metres (Nm)



SECTION 2

LIMITATIONS

TABLE OF CONTENTS

Paragraph		Page
2.1	GENERAL	2-2
2.2	AIRSPPEED LIMITATIONS	2-2
2.3	AIRSPPEED INDICATOR MARKINGS	2-2
2.4	Maximum Demonstrated Crosswind Strength	2-2
2.5	POWER PLANT LIMITATIONS	2-3
2.5.1	Engine	2-3
2.5.2	Engine Limitations	2-3
2.5.3	Fuel Grade	2-3
2.5.4	Lubricating Oil	2-5
2.5.5	Ground Running	2-5
2.5.6	Propeller	2-5
2.6	POWER PLANT INSTRUMENT MARKINGS.....	2-6
2.7	WEIGHT LIMITS.....	2-6
2.8	BAGGAGE LIMIT	2-6
2.9	CENTRE OF GRAVITY LIMITS.....	2-7
2.10	MANOEUVRE LIMITS.....	2-8
2.11	FLIGHT LOAD FACTOR LIMITS	2-8
2.12	FLIGHT CREW LIMITS	2-8
2.13	KINDS OF OPERATION LIMITS	2-8
2.13.1	Icing	2-8
2.13.2	Operation Equipment List	2-8
2.14	FUEL LIMITATIONS.....	2-10
2.15	MAXIMUM PASSENGER SEATING LIMITS	2-10
2.16	OTHER LIMITATIONS.....	2-10
2.17	PLACARDS.....	2-11
2.17.1	Cockpit Placards General	2-11
2.17.2	Cockpit Controls	2-13
2.17.3	External Fuselage.....	2-14



2.1 GENERAL

This section of the Pilot's Operating Handbook presents the various operating limitations, instrument markings, colour coding, and basic placards necessary for the safe operation of the aircraft, it's engine, standard systems and standard equipment.

All limitations contained in this section have been approved by the Australian Civil Aviation Safety Authority.

For specific operations, or for operations with equipment fitted that is covered by a supplement in Section 9 of the POH, limitations applicable will be found in the relevant supplement.

2.2 AIRSPEED LIMITATIONS

The indicated airspeeds in the table below are based on airspeed calibration data from Section 5.

SPEED	KIAS	REMARKS
Max Manoeuvring Speed (V_A)	112	Do not make full or abrupt control movements above this speed.
Never Exceed Speed (V_{NE})	140	Do not exceed this speed in any operation.
Max Structural Cruising Speed (V_{NO})	112	Do not exceed this speed except in smooth air and then with caution.
Maximum Flap Extension Speed (V_{FE})	84	Do not exceed this speed with the flaps deployed.

Table 2.2

2.3 AIRSPEED INDICATOR MARKINGS

The airspeed indicator markings in the table below are based on airspeed calibration data from Section 5.

MARKING	IAS VALUE or RANGE	SIGNIFICANCE
White Arc	48 - 84	Full Flap Operating Range. Lower limit is the maximum weight stalling speed in the landing configuration. Upper limit is the maximum speed with flaps fully extended.
Green Arc	58-112	Normal Operating Range. Lower limit is the maximum weight stalling speed with flaps retracted. Upper limit is the maximum structural cruising speed.
Yellow Arc	112-140	Operations must be conducted with caution and only in smooth air.
Red Line	140	Maximum speed for all operations (V_{NE}).

Table 2.3

2.4 Maximum Demonstrated Crosswind Strength

14 Knots.

**2.5 POWER PLANT LIMITATIONS****2.5.1 Static RPM**

Jabiru 2200B engine, C000242-D60P42 Propeller

- Full throttle static RPM 2700 – 3000 RPM

Jabiru 2200C engine, Certified Jabiru Propeller per Type Certificate VP503.

- Full throttle static RPM 2800 – 2900 RPM

2.5.2 Engine

Manufacturer: Jabiru Aircraft Pty Ltd
Model: Jabiru 2200B or 2200C

2.5.3 Engine Limitations

	POWER	RPM	Maximum Temperatures		Fuel Pressure Limits		Oil Pressure Limits	
			Cyl Head	Oil	Min	Max	Min	Max
Absolute Limits	Maximum Take-Off (80 BHP)	3300	200 °C (392 °F) (Note #1)	118 °C (244 °F)	5 kPa (0.75psi)	20 kPa (3psi)	220 kPa (31 psi)	525 kPa (76psi)
Continuous Limits	Maximum Cont (80 BHP)	3300	180 °C (356 °F)	100 °C (212 °F)	5 kPa (0.75psi)	20 kPa (3psi)	220 kPa (31 psi)	525 kPa (76 psi)
Limits For Ground Running	N/A	N/A	180 °C (356 °F) (Note #2)	100 °C (212 °F) (Note #2)	5 kPa (0.75psi)	20 kPa (3psi)	80 kPa (11 psi)	525 kPa (76 psi)

Note #1 Time with CHT at between 180°C and 200°C is not to exceed 5 Minutes

Note #2 If temperature limits are reached, shut the engine down or cool it by pointing the aircraft into wind.

Table 2.4.2

Other limits are as follows:

- Minimum oil pressure at idle: 80 kPa (11 psi)
- Maximum oil pressure at start: 525 kPa (76 psi)

2.5.4 Fuel Grade

- Avgas 100LL
- Avgas 100/130
- MOGAS with minimum Octane Rating of 95 RON¹ may be used.
- Do not use fuel additives such as Octane Boosters.

NOTE 1:

An automotive fuel's anti-detonation performance is usually measured using RON (Research Octane Number), MON (Motor Octane Number) or AKI (Anti-Knock Index). RON is always a higher number than both MON and AKI. As a general rule, RON can be approximated by adding 5 to a fuel's AKI (i.e. a fuel with an AKI of 89 will have a RON of approximately 94, and so must not be used.). As there are significant variations possible even between automotive fuels with the same values of RON, MON or AKI, Jabiru Aircraft strongly recommend using AVGAS.



Automotive fuels should only be used where AVGAS is not available, and if used, must have the highest anti-detonation rating practically available.

CAUTION

*Fuel additives containing alcohol (i.e. Ethanol etc) will damage the sealant used in the fuel tanks.
DO NOT use MOGAS with any level of added alcohol.*

NOTE

- As the use of Ethanol in MOGAS becomes more widespread it has become difficult to be sure of a fuel's Ethanol content. Jabiru Aircraft recommend the following test be carried out before a new batch of MOGAS is used in a J160-C.
- The test uses the principle of phase separation of a water/fuel sample and agitating the sample to induce phase separation. If alcohol is present, the alcohol combines with the water and separates out of the gasoline.
 - i) Using a clear jar of about 100-200 ml capacity (ideally a long and narrow jar) add about 10% by volume of water and mark the level of the water on the jar;
 - ii) Add a sample of the fuel to be tested to the jar so that the relative volumes are about 10% water, 90% fuel;
 - iii) Shake the sample vigorously and then allow the sample to settle;
 - iv) Check the level of the "water";
 - v) If the level is the same as previously marked on the jar, no alcohol is present in the fuel and the fuel is acceptable for use;
 - vi) If the level of "water" increases, alcohol is present in the fuel and that fuel may not be used in the J160-C.

NOTE

- For fuel tank capacities refer to section 2.14 Fuel Limitations.



2.5.5 Lubricating Oil

2.5.5.1 Engine Oil Specification:

Jabiru Aircraft approves lubricating oils of any brand name conforming to specifications MIL-L-6082 for straight mineral oil and MIL-L-22851 for ashless dispersant oil.

Straight mineral oil must be used during the first 50 hours of operation for new and overhauled engines, or until the oil consumption has stabilised. After the first 50 hours it is recommended that ashless dispersant oil be used.

2.5.5.2 Engine Oil Viscosity Grade:

The following chart is intended to assist in choosing the correct grade of oil and must be considered as a guide only. Multiviscosity grades can also be used as indicated

Average Ambient Temperature	Mineral Grades	Ashless Dispersant Grades
Above 35° C (95°F)	SAE 60	SAE 60
15° C to 35°C (59° to 95°F)	SAE 50	SAE 50
-17°C to 25°C (1° to 77°F)	SAE 40	SAE 40

Table 2.4.4.2-1

Equivalence of SAE and commonly used Commercial Grade designations:					
SAE:	20	30	40	50	60
Commercial:	55	35	80	100	120

Table 12.4.4.2-3

2.5.5.3 Capacity:

Total: 2.3 litres (2.4 US quarts)

2.5.6 Ground Running

In conditions with high ambient temperatures it is possible to overheat the engine during ground running. If engine temperatures reach the ground operating limits noted in Section 2.5.3 the engine must be stopped or the aircraft oriented to face into wind to reduce engine temperatures. Part 4 (Normal Operations) of this manual gives further information on ground handling.

2.5.7 Propeller

Manufacturer: Jabiru Aircraft Pty Ltd
Model: C000262-D60P42 or 4A401A0D
Type: Wooden, Fixed Pitch
Number of blades: 2
Diameter: 1524 mm (60 in)
Pitch: 1067 mm (42 in)
Max RPM: 3300

**2.6 POWER PLANT INSTRUMENT MARKINGS**

Instrument	Red Line Minimum Limit	Green Arc Normal Operating	Red Arc/Line Maximum Limit	Yellow Arc Precautionary Range
Tachometer	-	-	3300 RPM	-
Cylinder Head Temperature	-	Up to 180°C (356°F)	200°C (392°F)	180°C - 200°C (356° - 392°F)
Oil Pressure	80 kPa (11 psi)	220 - 525 kPa (31 - 76 psi)	525 kPa (76 psi)	80 - 220 kPa (11- 31psi)
Oil Temperature	15°C (59°F)	80 - 100°C (176° - 212°F)	118°C (244°F)	100°C - 118°C (212 °- 244°F)
Fuel Pressure	5 kPa (0.75psi)	5 - 20 kPa (0.75 - 3 psi)	20 kPa 3 psi	-
Voltage	-	10.5 - 15 Volts	-	-

Table 2.5

2.7 WEIGHT LIMITS

Maximum Take-Off and Landing Weight: 540 kg (1190 lb)

2.8 BAGGAGE LIMIT

Maximum Baggage 18kg behind each seat – 36kg total.

**2.9 CENTRE OF GRAVITY LIMITS**

Forward Limit:	180-mm (7.09", 18.2%MAC) aft of datum up to & including 440 kg (970lb) 233-mm (9.17", 23.5%MAC) aft of datum at 540kg (1190lb) Linear variation between points.
Aft Limit	292-mm (11.50", 29.5%) aft of datum at all weights
Datum	Wing Leading Edge
Levelling Means	
Longitudinal	Spirit Level placed on the lower section of the door frames (left or right side).
Lateral	Spirit Level placed across the fuselage between the left and right side lower door frames.
Arms	
Arm for Front Seat Station	297-mm aft of datum
Arm for Baggage On Shelf	920-mm aft of datum
Fuel Station	451-mm aft of datum

Table 2.7



2.10 MANOEUVRE LIMITS

Manoeuvres in the course of normal flying are approved.

Stalls may be carried out at bank angles of up to 60°.

All aerobatic manoeuvres including spins are prohibited.

2.11 FLIGHT LOAD FACTOR LIMITS

Flap Position	Speed	Positive	Negative
UP	V _A	+ 3.8g	-1.9g
UP	V _{NE}	+ 3.8g	-1.9-g
DOWN	V _{FE}	+ 2.0g	0g

Table 2.9

2.12 FLIGHT CREW LIMITS

Minimum flight crew is one pilot.

2.13 KINDS OF OPERATION LIMITS

This aircraft is approved for the following types of operations:

VFR Day

2.13.1 Icing

Flight into known icing conditions is prohibited.

2.13.2 Operation Equipment List

Table 2.11.2 summarises the equipment required for airworthiness under the listed type of operation. Refer to relevant local operating rule requirements for additional equipment that may be necessary operationally.

Additional equipment may be fitted to the aircraft but which is not essential for flight.

System Instruments and/or Equipment	VFR Day	Remarks
Communications		
VHF Comm	A/R	As required per local operating regulations
Electrical Power		
Alternator	1	
Battery	1	
Voltage Indicator	1	
Equipment & Furnishings		



System Instruments and/or Equipment	VFR Day	Remarks
Pilot seat and harness	2	Pilot seats are integral to the main structure
Fire Protection		
Portable Fire Extinguisher	A/R	As required per local operating regulations
Flight Controls		
Pitch Trim Indicator	1	
Pitch Trim System	1	
Flap System	1	
Stall Warning System	1	
Fuel		
Fuel Quantity Indicator	2	
Fuel On/Off Valve	1	
Ice & Rain Protection		
Engine Alternate Air Induction System	1	
Navigation & Pitot Static		
Altimeter	1	
Airspeed Indicator	1	
Magnetic Compass	1	
Time Piece	1	May be carried on the pilot
Turn Co-ordinator	A/R	As required per local operating regulations
Pitot/Static System	1	
Transponder	A/R	As required per local operating regulations



System Instruments and/or Equipment	VFR Day	Remarks
Engine Indicating		
Cylinder Head Temperature	1	Fuel, electrical, and vacuum systems
Tachometer	1	
Oil Pressure	1	
Oil Temperature	1	
Fuel Pressure	1	
Oil Quantity (Dip Stick)	1	
Caution Warning System	1	
Approved Flight Manual	1	

Table 2.11.2

2.14 FUEL LIMITATIONS

	Fuel Quantity	
	Total	Useable
Wing Tanks (each)	67.5 litres (17.8 US Gal)	67 litres (17.6 US Gal)
Sump Tank	6 litres (1.6 US Gal)	0 litres (0 US Gal)
Cumulative System Capacity	140 litres (37.3 US Gal)	135 litres (35.2 US Gal)

Table 2.12

NOTE:

- The total contents of the sump tank are considered to be unusable fuel.
- For Fuel Grade refer to section 2.4.3 Fuel Grade
- Fuel pickups are in wing roots. Care must be taken to maintain balanced flight at low fuel levels to ensure that fuel can be drawn from both tanks. If the aircraft is flown for extended periods in an unbalanced condition, it is possible to fully drain one tank while there is still fuel in the other.

2.15 MAXIMUM PASSENGER SEATING LIMITS

The maximum passenger seating capacity is one seated beside the pilot.

2.16 OTHER LIMITATIONS

- As the seat beside the pilot's seat is equipped with a functioning set of flight controls, refer to operational requirements for the occupation of this seat by a passenger.
- Cockpit doors may not be opened in flight except for emergency smoke/fume evacuation purposes.
- Maximum operating altitude is 10 000 feet.











- The maximum ambient operating temperature is 38°C.
- Smoking is not permitted.
- The aircraft may be operated onto and from hard sealed, gravel and grass surfaces.
- In-cabin noise levels exceed 95db. Hearing protection must be worn.


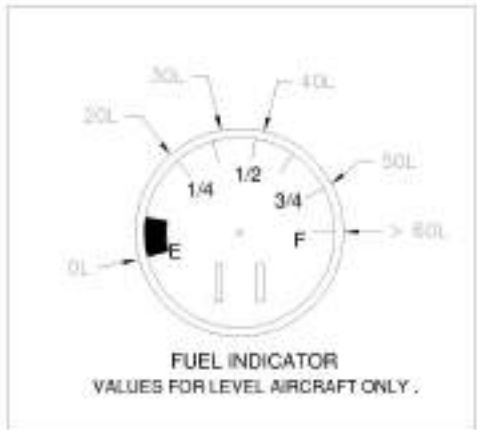


2.17 PLACARDS

The following placards are required, and are to be located in the proximity indicated. Each placard is to contain wording conforming with the illustrations. The shape and layout of production items may vary between individual aircraft. Consult the manufacturer for individual aircraft placard variations.

2.17.1 Cockpit Placards General

<p>Warning Placard P/No. 5A016A0D</p>	 <p>Fitted on the rear Face of the Forward Wing Spar Carry-through Beam in the Cabin Ceiling.</p>
<p>EFIS Warning P/No. 5A042A0D 1 OFF</p>	 <p>Fit to upper frame of DYNON EFIS if installed</p>
<p>No Smoking P/No. 5A035A0D</p>	 <p>Fit to instrument panel.</p>
<p>Owners Manual P/No 5036094</p>	 <p>Fitted to Inside of RH Door above the Door Pocket.</p>
<p>Door Open LHS P/No 5027094</p>	 <p>Fitted to the Outsides of LH Door Above the Door Catch Lever</p>
<p>Door Open RHS P/No 5028094</p>	 <p>Fitted to the outside of RH Door Above the Door Catch Level</p>
<p>Door String Placard P/No 5026094</p>	 <p>Fitted on Inside of both Doors Above Door Handle.</p>
<p>Fuel Contents P/No. 5A022A0D Where Equipped</p>	 <p>Fitted to sight glasses of wing fuel tanks.</p>



<p>Fuel Gauge P/No. 5A050A0D Where Equipped</p>	 <p>Fitted on the instrument panel immediately below fuel gauges.</p>
<p>Electric Fuel Gauge Quantities. P/No. 5A053A0D Where Equipped.</p>	 <p>Fit inside wing root immediately aft of windows through to electric fuel gauge senders</p>
<p>Compass Card P/No. 5123024</p>	 <p>Fit in compass card holder attached to compass.</p>
<p>Baggage P/No. 5A037A0D</p>	 <p>Fit to right side fuselage wall immediately below window.</p>








<p>Baggage P/No. 5111154</p>	 <p>Fit to inside of fuselage on right side just below rear quarter window. Locate vertical line in line with rear of baggage shelf.</p>
<p>Loading Limitations P/No 5098854</p>	 <p>Fitted on inside of fuselage of RHS of cabin below rear quarter window.</p>

Table 2.15.1

2.17.2 Cockpit Controls

<p>Trim Position P/No. 5A031A0D (1 OFF)</p>	 <p>Fit to centre console beside of elevator fwd stop, between trim levers.</p>
<p>Brake On P/No. 5A031B0D</p>	 <p>Fit to centre console beside brake lever, arrow pointing aft.</p>
<p>Fuel Tap Position P/No 502319N</p>	 <p>Fitted on the Main Beam in front of the Fuel SELECTOR Valve</p>




<p>Carby Heat P/No 5A030A0D</p>	 <p>Fitted to lower central section of instrument panel.</p>
-------------------------------------	---

Table 2.15.2

2.17.3 External Fuselage

<p>Static Port P/No 5043094</p>	<p style="text-align: center;">STATIC VENT KEEP CLEAR</p> <p>Attach to LHS of Vertical Fin in line with Static Tube</p>
<p>Fuel Grade- Wing Tanks P/No 5091344</p> <p>2 OFF</p>	<div style="border: 1px solid black; padding: 10px; text-align: center;"> <p>FUEL</p> <p>AVGAS 100LL</p> <p>67 LITRE CAPACITY</p> <p>EARTH ON POST</p> </div> <p>Attach to top skin of wing adjacent to Fuel Filler Cap.</p>
<p>Nose Wheel Inflation. P/No. 5A017A0D</p>	<div style="border: 1px solid gray; padding: 5px; text-align: center;"> <p>INFLATE NOSE WHEEL TO 28 psi (193 kPa)</p> </div> <p>Attach to left side of nose wheel spat.</p>
<p>Main Wheel Inflation. P/No. 5A018A0D</p>	<div style="border: 1px solid gray; padding: 5px; text-align: center;"> <p>INFLATE MAIN WHEEL TO 33 psi (228 kPa)</p> </div> <p>Attach to outsides of main wheel spats</p>
<p>Engine Oil P/No. 5A008A0D</p>	<div style="border: 1px solid gray; padding: 10px; text-align: center;"> <p>ENGINE OIL</p> <p>AEROSHELL W100 - SUMMER</p> <p>AEROSHELL 15W50 - WINTER</p> <p>OR EQUIVALENT AIRCRAFT GRADE</p> <p>DETERGENT ENGINE OIL</p> <p>DO NOT USE AUTOMOTIVE GRADE OILS</p> </div> <p>Attach to inner face of door in top engine cowl.</p>
<p>Dipstick Inside P/No. 5A007A0D</p>	<div style="border: 1px solid gray; padding: 5px; text-align: center;"> <p>DIPSTICK INSIDE</p> </div> <p>Fit to outside of oil door in upper engine cowl.</p>
<p>Door Lean. P/No. 5A013A0D</p>	<div style="border: 1px solid gray; padding: 5px; text-align: center;"> <p>DO NOT LEAN ON DOOR</p> </div>



	Fit to top of doors.
Wing Bolt Tightening P/No 5039094 Qty 8 Required	DANGER DO NOT TIGHTEN Attach to the fuselage and wings beside each wing, and lift strut attachment fitting.
Earth on Post P/No. 5A066A0D	EARTH ON POST Attach to upper wing skin beside fuel filler earth post.
No Step P/No. 5A006A0D Qty 2 required.	NO STEP Fit to top of main wheel spats
Earth on Exhaust P/No. 5029094	EARTH ON EXHAUST Attach to the lower fuselage on the pilot's side immediately above the exhaust outlet pipe.

Table 2.15.3



SECTION 3

EMERGENCY PROCEDURES

TABLE OF CONTENTS

Paragraph		Page
3.1	GENERAL.....	3-2
3.2	AIRSPEDS FOR EMERGENCY OPERATIONS.....	3-2
3.3	EMERGENCY PROCEDURES CHECK LISTS	3-2
3.3.1	Engine Failures	3-2
3.3.2	Airstart & Limitations.....	3-3
3.3.3	Forced Landings.....	3-4
3.3.4	Fires	3-4
3.3.5	Carburettor Icing.....	3-6
3.3.6	Landing With a Flat Main Tyre.....	3-6
3.3.7	Inadvertent Icing Encounter.....	3-6
3.3.8	Electrical Power Supply System Malfunctions.....	3-6
3.4	AMPLIFIED EMERGENCY PROCEDURES.....	3-7
3.4.1	Engine Failure	Error! Bookmark not defined.
3.4.2	Forced Landings.....	3-7
3.4.3	Ditching.....	3-8
3.4.4	Fires	3-8
3.4.5	Rough Engine/Loss of Power	3-9
3.4.6	Electrical Systems Malfunctions	3-9
3.4.7	Spins	3-10



3.1 GENERAL

Section 3 of this handbook describes the procedures to be adopted in the event of an emergency or abnormal situation occurring in the J160-C aircraft.

The procedures are arranged in the sequence considered to be the most desirable in the majority of cases. Steps should be performed in the order listed unless good reasons for deviation exist.

It should be remembered however, that all conceivable eventualities cannot be foreseen by the manufacturer. Particular circumstances such as multiple or unanticipated emergencies, adverse weather etc. may require modification to these procedures. A thorough knowledge of the aircraft and its systems is essential to analyse the situation correctly and determine the best course of action in any particular circumstance.

The following **basic rules** apply to all aircraft emergencies:

1. Maintain Aircraft Control.
2. Analyse the situation and take appropriate action.
3. Land as soon as practicable.

3.2 AIRSPEEDS FOR EMERGENCY OPERATIONS

- Manoeuvring Speed 102 KIAS
- Maximum Glide 65 KIAS*
- Landing Without Engine Power (Flaps Full) 60 KIAS

* - A slightly higher speed may give better distance over the ground if gliding into wind; a slightly slower speed if gliding downwind.

3.3 EMERGENCY PROCEDURES CHECK LISTS

3.3.1 Engine Failures

Engine Failure During Take-off Run

1. Throttle CLOSED
2. Brakes APPLY
3. Ignition OFF
4. Wing Flaps UP
5. Master Switch OFF
6. Fuel Shutoff Valve OFF

Engine Failure Immediately After Take-off

1. Airspeed 65 KIAS.
2. Ignition OFF (As time permits)
3. Fuel Shutoff Valve OFF (As time permits)
4. Wing Flaps FULL RECOMMENDED
5. Master Switch OFF
6. Braking HEAVY AFTER TOUCHDOWN

Engine Failure During Flight



1. Airspeed.....65 KIAS*
2. Carburettor Heat..... ON
3. Fuel Pump..... ON
4. Fuel Shutoff Valve..... CONFIRM ON
5. Fuel Quantity.....CHECK
6. Oil.....CHECK TEMP AND PRESSURE
7. Ignition.....CYCLE BOTH ON
8. Throttle.....CHECK LINKAGE OPERATION
9. Airstart.....ATTEMPT IF PROP STOPPED

* - A slightly higher speed may give better distance over the ground if gliding into wind; a slightly slower speed if gliding downwind.

3.3.2 Airstart & Limitations

In the event that the engine is stopped during flight, it may be restarted by application of fuel & ignition, provided that the propeller is still windmilling. The propeller may stop windmilling below 50 KIAS

The Jabiru 2200 engine is a high compression (7.8:1) engine & therefore airstarts when the propeller has stopped rotating, without the use of the starter, are unlikely before reaching V_{NE} . Therefore, the following procedure addresses only airstarts by use of the starter motor.

IMPORTANT – NO NOT depress starter button while propeller is rotating.

1. Ignition.....OFF
2. Cabin.....CLEAR
3. Airspeed.....REDUCE UNTIL PROPELLER
STOPS TURNING.
4. Establish Glide.....65 KIAS
5. Fuel.....ON
6. Fuel Pump..... ON
7. Master..... ON
8. Ignition Switches..... ON
9. Starter Button.....Depress
10. Throttle.....Open
11. Repeat as necessary, ensuring propeller has stopped before each restart attempt.

- Notes:**
- (a) If engine does not restart commence forced landing procedure.
 - (b) If clear symptoms of a mechanical failure exist, or if the engine has seized due to the loss of oil pressure, do not attempt a restart.
 - (c) If engine operates with only L or R ignition selected, leave the ignition switch in this position whilst a suitable landing area is selected.
 - (d) The engine cools quickly with the propeller stopped. Choke may needed to achieve a start.



3.3.3 Forced Landings
Emergency Landing Without Engine Power

1. Airspeed..... 65 KIAS
2. Ignition..... OFF
3. Fuel Shutoff Valve..... OFF
4. Fuel Pump..... OFF
5. Throttle..... CLOSED
6. Wing Flaps..... FULL PRIOR TO TOUCH DOWN
7. Master Switch..... OFF AFTER LOWERING FLAPS
8. Braking..... HEAVY AFTER TOUCH DOWN

Precautionary Landing With Engine Power

1. Airspeed 70 KIAS
2. Fuel Pump ON
3. Wing Flaps TAKE-OFF
4. Selected field..... OVERFLY & INSPECT
5. Wing Flaps FULL ON FINAL APPROACH
6. Airspeed 60 KIAS
7. Braking HEAVY AFTER TOUCH DOWN
8. Ignition..... OFF
9. Fuel Shutoff Valve OFF
10. Master Switch..... OFF

Ditching

1. Airspeed 65 KIAS
2. Power (if available) ESTABLISH 50 ft/min @ 55 KIAS
3. Approach
High Winds, Heavy Seas INTO WIND
Light Winds, Heavy Swells..... PARALLEL TO SWELLS
4. Wing Flaps FULL PRIOR TO TOUCH DOWN
5. Doors..... OPEN
6. Face CUSHION AT TOUCH DOWN
7. Touch Down SLOWEST PRACTICAL SPEED
8. Evacuate IF REQUIRED BREAK WINDOWS
9. Life Jackets / Life Rafts..... INFLATE
10. EPIRB (If Carried)..... ACTIVATE

3.3.4 Fires
On Ground

1. Ignition..... OFF
2. Fuel Shutoff valve..... OFF
3. Fuel Pump..... OFF
4. Master Switch OFF
5. Abandon aircraft
6. Fire..... EXTINGUISH



Engine Fire In Flight

- 1. ThrottleCLOSE
- 2. Fuel ValveOFF
- 3. Fuel PumpOFF
- 4. Ignition.....OFF
- 5. Master Switch.....OFF AFTER FLAPS DEPLOYED
- 6. Cabin Heat VentCLOSE
- 7. Cabin Air VentOPEN BOTH
- 8. AirspeedINCREASE UP TO VNE if required to
extinguish fire.
- 9. Forced Landing.....EXECUTE. Refer 3.3.3

Electrical Fire In Flight

- 1. Master Switch.....OFF
- 2. Ignitions.....ON
- 3. Electrical Switches.....OFF
- 4. Extinguisher.....ACTIVATE

If fire goes out:

- 5. SmokeVENTILATE CABIN (DOORS MAY
BE OPENED SLIGHTLY)
- 6. Precautionary Landing.....AS SOON AS PRACTICAL

If fire does not go out:

- 4. LandEXECUTE IMMEDIATELY

WARNING

With the Master Switch turned off the wing flaps will not deploy.

Cabin Fire

- 1. Master Switch.....OFF
- 2. Cabin Heat VentCLOSE
- 3. Cabin Air VentOPEN BOTH
- 4. Extinguisher (if fitted).....ACTIVATE
- 5. LandAS SOON AS PRACTICAL
- 6. Smoke/Fume Evacuation.....VENTILATE CABIN. DOORS MAY
BE OPENED SLIGHTLY.

Once fire is extinguished:

- 1. PowerREDUCE
- 2. Airspeed.....APPROX 80 KIAS
- 3. Cockpit Door(s).....CLOSE
- 4. PowerADJUST to maintain approx 80 KIAS
- 5. LandAS SOON AS PRACTICAL

NOTE

Doors should only be opened for emergency fume evacuation



3.3.5 Carburettor Icing

If Carburettor icing is suspected:

- 1. ThrottleFULL
- 2. CARB HEATFULL ON

NOTE

Carburettor heat may be used at any power setting, but will result in a slight power loss. When icing is eliminated, return CARB HEAT to OFF. Carburettor heat should not be used for take-offs.

Maintain carburettor heat in ON position for a minimum of 1 minute to allow all ice to melt.

Carburettor heat may be used on the ground except during take-off.

CAUTION

Do not use partial carburettor heat as this may exacerbate ice accretion.

3.3.6 Fuel Low Level Warning Light Illuminates (where equipped)

If fuel low level warning light illuminates:

- 1. ThrottleReduce to approx 2400RPM
- 2. Fuel gauges.....Check level. Fly aircraft with the wing with the most fuel above the other.
- 3. Precautionary Landing.....As soon as safe

NOTE

Refer to amplified procedures below.

3.3.7 Landing With a Flat Main Tyre

- 1. Landing AreaSUITABLE
- 2. ApproachNORMAL
- 3. Wing FlapsFULL DOWN
- 4. Touchdown.....GOOD TYRE(S) FIRST, hold aircraft off flat tyre as long as possible with aileron and/or elevator control
- 5. Ignition.....OFF
- 6. Fuel Shutoff ValveOFF
- 7. Master Switch.....OFF

3.3.8 Inadvertent Icing Encounter

Flight into known icing conditions is prohibited. If icing is inadvertently encountered, change level or turn back to obtain an outside air temperature less conducive to icing.

3.3.9 Electrical Power Supply System Malfunctions

Alternator Failure

- 1. Non-essential electrical equipmentOFF
- 2. LandAS SOON AS PRACTICAL

Alternator failure is indicated by the illumination of the "CHG FAIL" light on the instrument panel. While the Jabiru 2200 engine does not require external power to run, power consumption by the radio, transponder and other electrical systems will eventually discharge the battery.



3.4 AMPLIFIED EMERGENCY PROCEDURES

This section is provided to supply the pilot with additional information concerning emergency procedures in general. Elaboration of the procedures specified in the EMERGENCY PROCEDURES CHECK LISTS as well as the inclusion of some more generalised emergency procedures that can be better covered by a general descriptive procedure rather than a formal check list are included in this section. This will give the pilot a more complete understanding of these procedures.

3.4.1 Fuel Gauges / Low Level warning Light (where equipped)

The J160-C may be fitted with electronic fuel gauges on the instrument panel. In addition, the sender units which drive these gauges are visible in the wing root area and incorporate an analogue needle showing fuel level. While the gauges on the instrument panel are designed so that only extended changes in fuel level are shown, the sender units in the tank show the current level directly and so will change in flight as the fuel sloshes in the tank. These senders can be used as a direct confirmation of the level indicated on the gauges. Note that due to the shape of the wing tank the gauges will read full from when the tanks are full (67 Litres) until the level falls below approximately 50 litres.

The optional low fuel level warning light will illuminate when around 3 litres of fuel remain in the header tank. This will allow the crew around 10 minutes (at cruise power consumption) to attempt to fix the problem with the fuel feed (such as flying out of balance, with the wing containing more fuel higher to encourage fuel flow from it into the header tank) or to locate a suitable place for a precautionary landing. While false indications are possible from this system they are unlikely, and unless the pilot is confident that he has sufficient fuel **and** that it is reaching the header tank, he should immediately reduce fuel consumption and seek a suitable place to carry out a precautionary landing. Note that this is a separate system from the fuel pressure warning light.

3.4.2 Engine Failure

If an engine failure occurs during the take-off run, the most important action is to stop the aircraft on the remaining runway. The extra items in the checklist will provide additional safety after an engine failure on take-off.

If the engine fails shortly after lift off the initial response must be prompt lowering of the nose in order to maintain safe airspeed. In most cases, the landing should be executed straight ahead with only small changes in direction to avoid obstructions. After an engine failure on take-off, altitude and airspeed are seldom sufficient to execute a 180° gliding turn to return to the runway of departure. The checklist procedures assume that adequate time exists to secure the fuel and ignition systems prior to touch down.

After an engine failure in flight, the best glide speed should be established as quickly as possible. While gliding toward a suitable landing area, an effort should be made to identify the cause of the failure. If time permits, an engine restart should be attempted. If the engine cannot be restarted a forced landing must be executed.

3.4.3 Forced Landings

If all attempts to restart the engine fail and a forced landing is imminent, a suitable landing area should be selected and the EMERGENCY LANDING WITHOUT ENGINE POWER checklist should be completed if at all possible.



3.4.4 Ditching

The aircraft has not been flight tested in actual ditchings, therefore the recommended procedure is based entirely on the best judgement of the manufacturer.

If available, life jackets should be donned **but not inflated** until after evacuating the aircraft. Inflating the life jackets prematurely increases the risk of damage to them exiting the aircraft. Additionally their bulkiness adds to the difficulty of evacuating the aircraft.

Plan the approach into wind if the winds are high and the seas are heavy. With heavy swells and light winds, land parallel to the swell. If possible maintain a constant descent rate of approximately 50 ft/min almost until touchdown but reducing speed to the minimum practical immediately prior to touchdown. Water pressure may hold the doors closed, so the crew should be prepared to break out windows if necessary to equalise pressure and allow egress. An orderly evacuation of the aircraft should then be conducted.

3.4.5 Fires

Although engine fires are extremely rare in flight, the checklist procedures should be followed if one is encountered. After completion of this procedure, execute a forced landing. Do not attempt to restart the engine after an engine fire.

The initial indication of an electrical fire is usually the smell of burning insulation. Turning off the Master Switch should result in the elimination of the cause of this type of fire, but it will also result in the loss of all power to instruments & controls.



3.4.6 Rough Engine/Loss of Power

1. **USE OF POWER** Continuous RPM up to 3300 is allowed in normal operations. In emergencies engine RPM in excess of 3300 may be used, but this will only be available at speeds above about 100 KIAS.
2. **SPARK PLUG FOULING** Slight engine roughness in flight may be caused by one or more spark plugs becoming fouled by carbon or lead deposits. This may be verified by selecting each ignition switches momentarily to OFF. An obvious power loss in single ignition operation is evidence of spark plug or ignition system trouble. Assuming that the spark plugs are the more likely cause, applying full throttle may clear the plug fouling. If this does not solve the engine problem, plan to land at the nearest practical airfield to have the situation investigated.
3. **IGNITION MALFUNCTION** A sudden engine roughness or misfiring is usually evidence of carburettor icing or ignition system problems. In the case of ignition system trouble, switching each ignition switch off in turn should identify which system is malfunctioning. Different power settings may alleviate the problem. If not, plan to land at the nearest practical airfield to have the situation investigated.
4. **CARBURETTOR ICING** Rough running and loss of power may be caused by carburettor icing. This is most likely in conditions of high humidity and at low power settings. If not corrected, ice build up in the carburettor throat will cause complete power loss. If carburettor icing is suspected, immediately apply full carburettor heat until normal engine operation is restored, and the heat can be selected OFF. Carburettor heat should only be selected ON or OFF, as partial heat application may exacerbate ice build-up. The aircraft can be safely operated with carburettor heat applied for indefinite periods, but there will be a slight power loss. Hence, carburettor heat should not be used when full power is required; e.g. for take-off.
5. **LOW OIL PRESSURE** If low oil pressure is accompanied by normal oil temperature, there is a possibility that the oil pressure gauge or the relief valve is malfunctioning, and an immediate precautionary landing is not warranted. A landing at the closest practical airfield is advisable however so that the source of the trouble can be investigated. If a total loss of oil pressure is accompanied by a rise in oil temperature, an engine failure is probably imminent. Reduce engine power immediately and select a suitable forced landing area. Use only the minimum power required to reach the desired touch down point.

3.4.7 Electrical Systems Malfunctions

The electrical system is straight forward but to obtain the necessary degree of reliability and redundancy the system must be operated correctly. Normal operation is with the Master Switch in the ON position. Should the need to shed electrical loads arise the pilot should use their discretion to turn off all non-essential electrical equipment. More severe electrical system failures, such as those resulting in fire, require the Master Switch to be switched off. In addition to the general guide above specific failures may be dealt with as follows.

1. **INSUFFICIENT RATE OF CHARGE** If the "CHG FAIL" light illuminates in flight, minimal or no electrical power is being supplied by the alternator. If the battery charge drops sufficiently electrical systems will fail. While the Jabiru engine does not require external power while running, devices such as radios, transponders, GPS units, and



intercoms will eventually drain the battery. If this light illuminates, consideration should be given to landing at the nearest practical airfield, though – provided the eventual total loss of electrical services will not affect the safety of flight – the flight may continue.

2. **CIRCUIT BREAKERS** Failure of an individual circuit will, in most circumstances, result in opening of the relevant circuit/switch breaker. To ensure a permanent fault exists in the circuit the breaker should be reset once. If the breaker again pops the circuit is faulty and the flight should be continued without that service.

3.4.8 Spins

Intentional spins are prohibited in this aircraft. Should an inadvertent spin occur, the following recovery procedure should be used:

1. **Retard the throttle to idle**
2. **Centralise ailerons**
3. **Apply and hold full rudder opposite to the direction of rotation**
4. **Move stick progressively forward far enough to break stall**
5. **Hold these control inputs until rotation stops**
6. **As rotation stops, centralise rudder and make a positive, smooth recovery from the resulting dive**

WARNING

*If the spin is encountered with flaps extended, DO NOT retract flaps until rotation ceases.
Premature flap retraction will delay recovery.*



CASA APPROVED

Jabiru Aircraft
Model J160-C

SECTION 3
EMERGENCY
PROCEDURES

This Page Intentionally Left Blank



SECTION 4

NORMAL PROCEDURES

TABLE OF CONTENTS

Paragraph		Page
4.1	GENERAL	4-2
4.2	SPEEDS FOR NORMAL OPERATION.....	4-2
4.3	PREFLIGHT INSPECTION.....	4-3
4.4	NORMAL PROCEDURES CHECK LISTS	4-6
4.4.1	Before Starting Engine.....	4-6
4.4.2	Starting Engine - Cold.....	4-6
4.4.3	Before Take-Off.....	4-6
4.4.4	Take-Off	4-7
4.4.5	Initial Climb.....	4-7
4.4.6	Cruise.....	4-7
4.4.7	Descent.....	4-7
4.4.8	Before Landing (and flight below 1000ft AGL).....	4-7
4.4.9	Landing	4-7
4.4.10	Balked Landing.....	4-7
4.4.11	After Landing/Securing	4-8
4.5	AMPLIFIED PROCEDURES.....	4-8
4.5.1	Preflight Inspection	4-8
4.5.2	Electric Fuel Gauges (where equipped):	4-8
4.5.3	Starting Engine.....	4-8
4.5.4	Taxiing.....	4-9
4.5.5	Engine Management – Ground Running.....	4-9
4.5.6	Before Take-Off.....	4-10
4.5.7	Take-Off	4-10
4.5.8	Climb.....	4-10
4.5.9	Cruise.....	4-11
4.5.10	Stalls	4-11
4.5.11	Approach and Landing.....	4-11
4.5.12	Cross Wind Landing	4-11
4.5.13	Balked Landing.....	4-11
4.5.14	Flight Over Water	4-11



4.1 GENERAL

Section 4 of this handbook describes the procedures to be adopted for normal operations of the J160-C aircraft.

The procedures are arranged in the sequence considered to be the most desirable and therefore steps should be performed in the order listed unless good reasons for a deviation exist.

4.2 SPEEDS FOR NORMAL OPERATION

Unless otherwise noted, the following speeds are based on a maximum weight of 540 kg (1190lb) and may be used for any lesser weight.

Take-Off:

- T.O.S.S. (Speed @ 50 ft) 66 KIAS
- Normal Climb Out..... 70 KIAS (Take Off Flap)

Climb, Flaps Up:

- Initial (scheduled climb)..... 70 KIAS
- Enroute 70-80 KIAS

Landing Approach:

- V_{REF} (Speed @ 50 ft) 63 KIAS
- Balked Landing 65 KIAS Initially

Maximum Recommended in Turbulence:

- All Weights 102 KIAS

Maximum Demonstrated Crosswind Velocity: 14 knots



4.3 PREFLIGHT INSPECTION

Before flight, a careful visual inspection is to be carried out to ensure that the aircraft and its systems are serviceable. The following Figure is to be used in conjunction with the preflight inspection checklist:

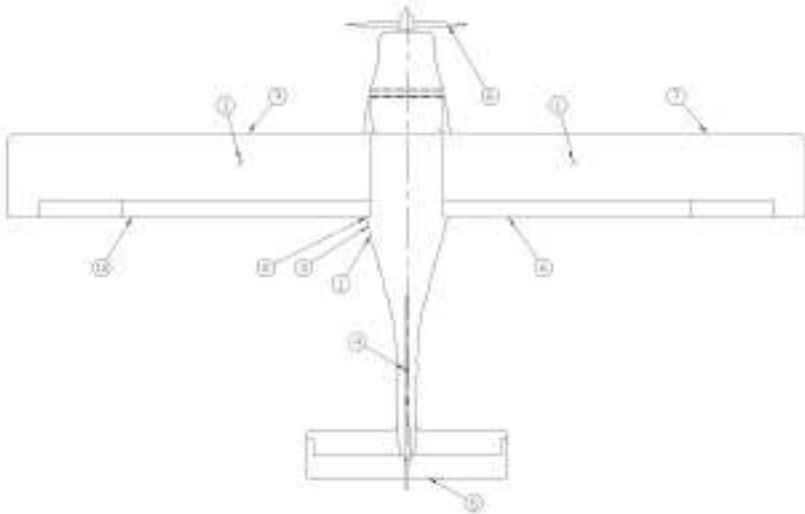


Figure 4-1. Pre-flight Inspection

1. Fuel

- Quantity in both tanks Check
- Fuel caps Secure
- Water Check Both tanks and header tank

2. Cockpit

- Ignition Switches OFF
- Control lock (if fitted) REMOVE
- Fuel CHECK CONTENTS
- Fuel valve ON
- Master switch ON
- Alternator Warning Light CONFIRM ON Before Start
- Master Switch OFF
- Aileron and elevator cables & fasteners ... CHECK
- Rudder and nose wheel steering linkage CHECK
- Rudder centring springs CHECK
- Controls (all) CHECK full travel, free movement.
- Harnesses & Seats CHECK CONDITION
- Windshield CLEANLINESS
- Cockpit area GENERAL CONDITION
- Loose objects SECURE
- Cockpit Doors/Latches CONDITION & OPERATION
- Flight Manual AVAILABLE



3. Left Undercarriage

- Mount boltsCHECK SECURE*
- TyreCHECK CONDITION / INFLATION

* - Lock the hand brake on, then pull the aircraft forwards. Some flexing of the undercarriage legs is normal, but there should be no movement of the top of the leg relative to the fuselage.

4. Static Source

- Static Source.....CHECK FOR BLOCKAGE

5. Empennage

- Tail tie-down.....DISCONNECT
- Control surfaces.....CHECK Security & Full & Free Movement
- Rudder, Elevator & Trim Cables.....CHECK Security & Full & Free Movement

6. Right Wing – Trailing Edge

- AileronCHECK Security & Full & Free Movement
- Flap.....CHECK Security
- Control rods & cables.....CHECK Security. Check rod ends for freedom of rotation & excess movement.

7. Right Wing

- Wing Tie-DownDISCONNECT
- Wing Strut Mount Bolts.....CHECK Security**
- Wing Root Mount Bolts.....CHECK Security***
- Pitot TubeREMOVE COVER, CHECK for blockage.

** - Wing strut bolts must not be tightened. Nut should just bear on washer.

*** - Holding the wingtip, push the tip up & down, forwards & backwards. If a wing / strut attachment is degrading, slop will be felt.

8. Nose

- Propeller & SpinnerCHECK for nicks & security
- Cowl.....CHECK Security, rubbing on engine.
- Engine OilCHECK using oil filler door.
- Nose WheelCHECK condition & pressure.

9. “Pulling Through” The Engine

Before the first flight of the day the engine must be “pulled through” by hand. This is the process of turning the engine over by turning the propeller by hand. The compression of each cylinder in turn will be felt a resistance as the propeller is turned. The engine should be rotated for a count of at least 8 compressions.

- Master Switch OFF
- Ignitions OFF
- Throttle..... Closed
- Propeller TURN by hand & observe engine for odd noises or heavy movements. Check for regular compression.

CAUTION:

Prior to pulling through the propeller by hand, the engine must be cold, both ignition circuits & the Master Switch must be switched OFF, the brakes applied & throttle closed.



WARNING

**A hot engine may fire with the ignition/s switched OFF.
DO NOT pull through a hot engine.**

CAUTION

Several causes of irregular compression – such as poorly sealing valves – can lead to extensive engine damage if not addressed. The Jabiru 2200 Engine Instruction & Maintenance Manual provides additional details.

10. Left Wing

- Wing Tie-Down DISCONNECT
- Wing Strut Mount Bolts CHECK Security**
- Wing Root Mount Bolts CHECK Security***

11. Left Wing – Trailing Edge

- Aileron CHECK Security & Full & Free Movement
- Flap CHECK Security
- Control rods & cables CHECK Security. Check rod ends for freedom of rotation & excess movement.



4.4 NORMAL PROCEDURES CHECK LISTS

4.4.1 Before Starting Engine

- Pre flight Inspection.....COMPLETED
- Passenger Briefing.....COMPLETED
- Harnesses.....SECURE
- BrakesON/PARK
- AvionicsOFF
- Circuit BreakersIN
- Fuel Level Warning Light (if fitted).....CHECK OPERATION using test switch

4.4.2 Starting Engine - Cold

- Master SwitchON
- Fuel Shutoff Valve.....ON
- Carburettor HeatOFF
- ChokeON*
- Throttle.....CLOSED
- Fuel PumpON
- Ignition switches.....ON
- Starter.....ENGAGE when engine fires RELEASE**
- Oil PressureCHECK (pressure to be indicated within 10 secs)
- ChokeClosed
- Throttle900 – 1000 RPM
- Alternator Warning Light.....CHECK OFF
- AvionicsON

* - If the engine is hot, proceed as for cold engine, but do not use choke.

** - If the engine is turning at less than 300 RPM it will not start.

4.4.3 Before Take-Off

- Park BrakeON

Ground Check & Run Up

- Warm Up.....1000-1200 RPM avoid prolonged idle at low RPM
- Ignition Check2000 RPM Both-L-Both-R-Both. Max drop 100RPM
- Carburettor heat2000 RPM – ON – slight drop in RPM
- Carburettor heat2000 RPM – OFF – RPM restored
- Power Check.....2850 RPM +/- 150 RPM
- Idle Check.....700 – 900 RPM
- TrimSET – Neutral

Pre Take-Off

- Master SwitchON
- Ignition switches.....BOTH ON
- Fuel Shutoff Valve.....ON
- Fuel Quantity.....CHECK sufficient for task
- Fuel PumpON
- FlapsTAKE OFF (first stage)
- InstrumentsSET AND CHECK ALL
- SwitchesSELECTED as required
- Circuit BreakersCHECK
- ControlsFULL & FREE TRAVEL, CORRECT SENSE



Hatches CLOSED & LOCKED
 Harnesses SECURE all seat belts correctly fastened and adjusted
 Oil temperature ABOVE 50°C

4.4.4 Take-Off

Carburettor heat OFF
 Throttle FULL OPEN
 Elevator Control NEUTRAL
 Directional Control NOSEWHEEL STEERING & RUDDER
 Rotate 30 – 40 KIAS raise nosewheel clear of ground
 Take Off Safety Speed 66 KIAS
 Accelerate to Climb Speed 70 KIAS
 Flaps UP... Accelerate to 70 KIAS
 Fuel Pump OFF at top of climb.
 Power SET as required.

4.4.5 Initial Climb

Throttle FULL OPEN
 Airspeed 70 KIAS

4.4.6 Cruise

75% Power 2800 RPM (14 L/hr)

4.4.7 Descent

Power As required
 Carburettor heat As required

4.4.8 Before Landing (and flight below 1000ft AGL)

Brakes OFF
 Harnesses SECURE
 Fuel Pump ON

4.4.9 Landing

Airspeed @ 50ft 63 KIAS
 Wing Flaps FULL
 Directional Control RUDDER & NOSEWHEEL STEERING
 Power AS REQUIRED
 Touchdown Main wheels first
 Braking AS REQUIRED

NOTE

If the aircraft is contaminated by build up of insects or other debris, increase approach speed @ 50ft to 68 KIAS

4.4.10 Baulked Landing

Power FULL THROTTLE
 Carburettor heat COLD
 Wing Flaps RETRACT SLOWLY
 Airspeed ESTABLISH NORMAL CLIMB SPEED



4.4.11 After Landing/Securing

- Wing FlapsUP
- Fuel PumpOFF
- Parking BrakeON/AS REQUIRED
- AvionicsOFF
- IgnitionOFF
- Master SwitchOFF
- ControlsSECURE

4.5 AMPLIFIED PROCEDURES

This section is provided to supply the pilot with additional information concerning normal procedures in general. Elaboration of the procedures specified in the NORMAL PROCEDURES CHECK LISTS as well as the inclusion of some more generalised procedures that can be better covered by a general descriptive procedure rather than a formal check list are included in this section. This will give the pilot a more complete understanding of these procedures.

4.5.1 Preflight Inspection

The Preflight inspection as covered by the PREFLIGHT INSPECTION CHECKLIST is recommended prior to the first flight of the day. Inspection procedures for subsequent flights can be abbreviated provided essential items such as fuel and oil quantities, security of fuel and oil filler caps are satisfactory. After refuelling fuel samples must be taken from all drain points, three in total, one in each of the two wing fuel tanks and one under the fuselage.

Aircraft operated from rough strips, especially at high altitudes, are subject to abnormal undercarriage abuse. Frequent checks of all undercarriage components, tyres and brakes is warranted in these situations.

4.5.2 Electric Fuel Gauges (where equipped):

The fuel gauges used in the J160-C use a sender unit which has a built-in analogue needle indicator for fuel level. These senders are located in the wing roots and are visible to the crew. these units may be used to confirm the fuel level being displayed by the gauges fitted to the instrument panel. Note that due to the shape of the wing tanks, the gauges will read full from when the tank is full until it's level has dropped below around 50 litres. This must be taken into account by manually checking fuel quantity (dipping the tanks) before a long flight.

4.5.3 Starting Engine

The Jabiru 2200 engine is fitted with a dual electronic ignition system. The engine will not start below 300 RPM, which precludes the option of hand swinging or "propping" an engine when there is insufficient charge available in the aircraft battery for a normal start. Starting using an external power source involves removing the upper engine cowl, attaching jumper leads to the battery terminals and proceeding with the normal start sequence.

WARNING

When the engine is started, and battery charge restored, shut down before re-fitting the engine cowl



After starting, oil pressure should start to rise within 10 seconds. If it does not rise within this time stop the engine and investigate the cause.

4.5.4 Taxiing

Positive control is available to the pilot when taxiing the J160 due to the direct linkage type nosewheel steering. Care should be exercised in strong winds, particularly in quartering tail wind conditions. As with any high wing configuration aircraft, appropriate elevator and aileron control positions are essential during taxiing operations particularly during strong tail wind conditions.

Taxiing over loose gravel or stones should be done at low engine RPM to minimise propeller damage.

4.5.5 Engine Management – Ground Running

The 2200 engine fitted to the J160-C is cooled by air flowing over the engine and oil cooler. During ground running care must be taken to ensure that there is adequate airflow and that safe engine temperatures are maintained. The guidelines presented below will assist in controlling temperatures.

- Minimise ground running times – especially in hot weather¹.
- Carry out as many checks as possible before starting the engine.
- Always carry out engine run-up tests with the aircraft pointing into wind.
- In hot weather, after performing run-up checks, leave the aircraft pointing into wind and idling at 1200rpm for 30 seconds to aid cooling.
- If the aircraft is required to wait – such as for runway clearance – temperatures must be monitored, and if they approach ground running limits (listed in Section 2 of this flight manual & displayed as yellow markings on engine gauges) the aircraft must be turned into wind or shut down to prevent any further temperature increase.
- Wind must be coming from within approximately 45° of the aircraft heading to be effective in aiding engine cooling.
- If there is no wind or low wind the engine must be shut down if ground-running temperature limits are reached.

¹ 30°C and above



4.5.6 Before Take-Off

Warm Up

Most of the warm up will have occurred during taxiing and whilst conducting the Before Take-Off checks. The engine is warm enough for take-off when the cylinder head and oil temperatures are in the green arcs.

Ignition System Check

The magneto check should be made at 2000 RPM as indicated by the tachometer with the carburettor heat set to COLD. Select the LEFT ignition OFF and note the RPM drop, return to BOTH until the engine regains speed. Select RIGHT ignition OFF and note the RPM drop, return to BOTH. Drop in RPM should not exceed 100 RPM. Do not operate on a single ignition source for an extended period; a few seconds is usually sufficient to check RPM drop and will minimise spark plug fouling.

4.5.7 Take-Off

Power Check

Full throttle runups over loose gravel are especially harmful to the propeller and should be avoided. When take-offs must be made from a gravel surface, it is very important that the throttle be advanced slowly and a rolling start take-off technique be used to minimise propeller damage.

It is important to check full throttle engine performance early in the take-off run. Any sign of rough engine operation or sluggish acceleration is good cause for discontinuing the take-off and conducting a full power runup to confirm normal engine operation prior to the next take-off attempt.

Wing Flap and Power Settings

Normal take-offs are accomplished at full throttle, and TAKE-OFF flap selected. The flaps should not be retracted until a safe height is achieved and all obstacles have been cleared. Take-offs may be made with flaps up but this will increase the take-off distance and will result in a more pronounced nose up attitude at lift off.

4.5.8 Climb

Initial climb

Initial climb is performed with flaps up full throttle 71 KIAS.

Enroute climb

Enroute climbs are performed with flaps up, full throttle, and at speeds 5 to 10 knots higher than the initial scheduled climb speed. This provides better engine cooling with little loss of climb performance.



4.5.9 Cruise

The power setting and cruising altitude are the two major factors that will affect the cruising speed and range of the J160. Other influencing factors include the weight and loading, temperature and equipment installed in a given aircraft. The maximum power setting normally used for cruise is 75% of the engine's rated power. Power settings below this will result in increased range and endurance corresponding with the reduced fuel consumption. At a power setting of 45% the J160 is capable of attaining an endurance of close to 13 hours, for a range of over 1000 nautical miles. For efficient and economical operation as well as to achieve maximum engine service life the engine must always be operated in accordance with the procedures and specifications set out in the engine manufacturer's operator's manual.

4.5.10 Stalls

In any attitude or under any loading condition there is no natural stall warning. An artificial stall warning horn is set to activate 5 to 10 KIAS above the stall speed in any configuration. All controls are effective up to and completely through the stall and there is no noticeable tendency to enter a spin after the stall.

4.5.11 Approach and Landing

Landings are normally conducted with full flaps. The landing approach is conventional. Care must be taken to ensure airspeed is accurately maintained during the final landing approach. Timely and appropriate use of power should be exercised to maintain the desired flight path and airspeed. Excessively high approach speeds will result in prolonged floating and increased landing distance. Normally the throttle should be fully closed during the 'flare' to reduce the tendency to float and prolong the touchdown. Touchdown should occur on the main wheels initially, followed by the nose gear which should be held clear of the ground during the initial ground roll. Positive braking may then be applied depending on requirements and circumstances. For maximum braking effectiveness the wing flaps should be retracted and back pressure applied to the control column.

4.5.12 Cross Wind Landing

The J160-C has been approved for operations in crosswinds of up to 14 Knots.

When landing in a strong cross wind use a wing low, crab, or a combination method of drift correction. Avoid a prolonged hold off by allowing the aircraft to settle onto the runway in a slightly nose high and wing low attitude, touching down on the into wind mainwheel first followed by the other mainwheel and then the nose gear in quick succession. In strong and/or gusty wind conditions it may be desirable to make the final approach at a slightly higher than normal airspeed with partial or no flap selected.

4.5.13 Baulked Landing

In a baulked landing (go-around), the wing flaps should be retracted to take-off immediately after full power has been applied. Upon reaching a safe airspeed, the flaps should be smoothly retracted to the full up position and a normal climb established.

4.5.14 Flight Over Water

When life preservers and rafts are required, crew life preservers should be worn at all times. Life rafts can be stowed in the baggage compartment.



CASA APPROVED

Jabiru Aircraft
Model J160-C

SECTION 4
NORMAL PROCEDURES

This Page Intentionally Left Blank



SECTION 5

PERFORMANCE

TABLE OF CONTENTS

Paragraph		Page
5.1	GENERAL	5-2
5.2	APPROVED DATA	5-3
5.2.1	Airspeed Indicator System Calibration.....	5-3
5.2.2	Stall Speeds.....	5-4
5.2.3	Take-Off Performance	5-4
5.2.4	Landing Distances	5-5
5.2.5	Climb	5-6
5.3	ADDITIONAL INFORMATION.....	5-8
5.3.1	Cruise	5-8
5.3.2	Endurance	5-8
5.3.3	Balked Landing Climb	5-9
5.3.4	Performance Effects of Dirt / Insects	5-9
5.3.5	Demonstrated Crosswind Performance.....	5-9
5.3.6	Noise Data.....	5-9



5.1 GENERAL

The performance data on the following pages is presented so that you may know what to expect from the aircraft under various conditions, and also to facilitate the planning of flights in detail and with reasonable accuracy. The data has been computed from actual flight tests with the aircraft and engine in good condition and using average piloting techniques.

Performance data is presented in tabular or graphical form to illustrate the effect of different variables. Sufficiently detailed information is provided in the tables so that conservative values can be selected and used to determine the particular performance figure with reasonable accuracy.

Cruise performance data assumes that the aircraft is clean the engine is operating correctly, and the propeller is undamaged. Some indeterminate variables such as carburettor settings, engine and propeller condition, and air turbulence may account for variations in range and endurance. It is therefore important to utilise all available information to estimate the fuel required for a particular flight.

**5.2 APPROVED DATA****5.2.1 Airspeed Indicator System Calibration****Conditions:****Power:** As required for level flight or maximum rated RPM as appropriate.

KIAS	KCAS		
	Flaps UP	Flaps Take-off	Flaps Landing
47	-	-	45
50	-	48	48
56	53	54	54
57	54	55	55
63	60	60	60
73	70	70	70
85	81	82	82
94	90	-	-
106	101	-	-
117	112	-	-
125	120	-	-
135	129	-	-
146	140	-	-

NOTE*Indicated airspeed assumes zero instrument error*



5.2.2 Stall Speeds

Associated conditions:

Power: Idle

Centre of Gravity: Forward Limit

Weight: 540 kg (1190 lbs)

	Angle of Bank							
	0°		30°		45°		60°	
Flaps	KIAS	KCAS	KIAS	KCAS	KIAS	KCAS	KIAS	KCAS
Up	58	53	60	57	66	63	79	75
T/O	51	48	54	52	59	57	71	68
Land	48	45	50	48	56	54	67	64

NOTE

Stalling speeds will reduce as weight is reduced.

Stalling speed will reduce as centre of gravity is moved aft, however the reduction is small.

5.2.3 Take-Off Performance

The following table contains data enabling the take-off distance to be determined for a variety of operating conditions. The take-off distances are given in metres.

The table is based on take-off distances from rest to a height of 15 metre (50 foot) with the engine operating at take-off power which is with throttle in the fully open position, and with the flaps extended to the take-off setting which is a 17 degree extension. .

The distances presented are for operating on a level bitumen surface. When taking off from short dry grass increase the take-off distance by 7%. When taking off from soft ground or unusually long and/or wet grass the take-off distance will be even longer. The pilot should therefore ensure that adequate strip length is available to cover these conditions.

The technique used in establishing the data in the take-off distance table involves accelerating the aircraft along the ground with the elevators held neutral, then rotating and commencing a climb so that the take-off safety speed (T.O.S.S.) 66-KIAS is achieved and maintained at or before the 15 metre (50 foot) height point.

The data is presented for the maximum permitted take-off weight of 540-kg.

Extrapolation outside the boundaries of the Take-Off Distance Table is not permitted. When the outside air temperature and/or pressure height is below the lowest range included in the table, the aircraft performance shall be assumed to be no better than that appropriate to this lowest



range. The performance information is not valid when the outside air temperature and/or pressure height exceeds the maximum values for which this information is scheduled.

Take Off Distance								
Weight (kg)	Pressure Altitude (ft)	Outside Air Temperature (degC)						
		-20	-10	0	10	20	30	38
540	0	369	391	415	439	464	490	511
	2000	413	438	465	493	523	553	579
	4000	464	494	525	559	593	630	661
	6000	524	560	598	638	680	726	764
	8000	598	641	687	737	790	847	897

For every 1 knot of head-wind component, the take-off distance can be reduced by 11-metres.

For every 1 knot of tail-wind component the take-off distance required MUST be increased by 16 –metres.

5.2.4 Landing Distances

The landing distance table presented below provides information to achieve the minimum landing distance for a variety of operating conditions. The data is applicable when using a power off glide approach with the flaps extended to the “Landing Flap” or fully extended position, and is based on landing distances from a height of 15 metre (50 feet) to stop.

The landing distance is provided for a hard bitumen surface. Wet and/or slippery surfaces will increase the landing distance over that scheduled and the pilot should therefore ensure that adequate strip length is available to cover these conditions.

The technique used in establishing the Power Off Approach Landing Chart distance is such that the aircraft approaches with idle power down to the 15 metre (50 foot) height point at 63 KIAS. After touch down maximum wheel braking is used to bring the aircraft to a stop.

When the outside air temperature and/or pressure height is below the lowest range scheduled on the charts, the aircraft performance shall be assumed to be no better than that appropriate to this lowest range. The performance information is not valid when the outside air temperature and/or pressure height exceeds the maximum values for which this information is scheduled.

Landing Distance (metres)								
Weight (kg)	Pressure Altitude (ft)	Outside Air Temperature (degC)						
		-20	-10	0	10	20	30	38
540	0	432	440	448	456	464	472	478
	2000	447	456	464	473	481	490	497
	4000	464	473	482	491	500	510	517
	6000	482	492	502	511	521	531	539
	8000	501	512	523	533	544	555	563

For every 1 knot of head-wind component, the landing distance can be reduced by 11-metres.

For every 1 knot of tail-wind component the landing distance required MUST be increased by 17 –metres



5.2.5 Climb

5.2.5.1 Best Rate of Climb Speed

The speed to obtain the best climb gradient when the flaps are fully retracted is 68 KIAS. This speed does not vary with altitude.

5.2.5.2 Scheduled Climb

Associated conditions:

Power: Full Throttle

Airspeed: 71 KIAS

Flaps: UP

Rate of Climb (ft/min)								
Weight (kg)	Pressure Altitude (ft)	Outside Air Temperature (degC)						
		-20	-10	0	10	20	30	
540	0	453	461	680	623	570	520	482
	2000	685	624	566	513	463	416	381
	4000	570	512	459	409	362	318	285
	6000	460	407	357	310	266	225	194
	8000	357	306	259	216	174	136	106
520	0	856	788	724	665	610	559	520
	2000	730	666	607	552	500	452	416
	4000	610	551	496	444	396	351	317
	6000	498	442	390	342	297	255	223
	8000	391	339	290	245	203	163	133
500	0	908	837	772	711	654	601	561
	2000	778	712	651	594	541	491	453
	4000	654	593	536	483	433	386	351
	6000	538	480	427	377	331	287	254
	8000	427	374	324	277	234	192	161
480	0	965	892	824	761	702	646	605
	2000	830	761	698	639	584	533	494
	4000	702	638	579	524	473	425	388
	6000	581	522	467	415	367	322	288
	8000	467	412	360	312	267	224	192
	10000	359	307	259	214	171	131	101
460	0	1026	950	880	814	753	696	653
	2000	886	815	750	689	632	578	538
	4000	753	688	626	569	516	466	429
	6000	628	567	510	457	407	360	325
	8000	510	453	399	350	303	259	226
440	0	1094	1015	941	873	810	750	705
	2000	948	874	806	742	683	628	586
	4000	810	741	678	619	563	512	473
	6000	680	616	557	502	450	402	365
	8000	557	498	442	391	342	297	263



5.2.5.3 Take-Off Configuration Climb

Associated conditions:

Power: Full Throttle

Airspeed: 68 KIAS

Flap: 17

Rate of Climb (ft/min)								
Weight (kg)	Pressure Altitude (ft)	Outside Air Temperature (degC)						
		-20	-10	0	10	20	30	38
540	0	818	746	679	616	558	503	461
	2000	685	617	554	495	441	389	350
	4000	558	495	436	381	329	281	244
	6000	438	378	323	272	223	178	143
	8000	323	268	216	167	122	79	46
520	0	871	796	727	662	601	545	502
	2000	733	663	598	537	481	428	388
	4000	602	536	476	419	366	316	279
	6000	478	417	360	307	257	210	174
	8000	360	303	249	199	152	108	75
500	0	927	850	778	711	649	590	546
	2000	784	712	645	583	524	469	428
	4000	649	582	519	461	406	354	316
	6000	521	458	399	344	293	245	208
	8000	399	340	285	234	186	140	106
480	0	988	908	834	765	700	640	594
	2000	840	766	696	632	571	515	472
	4000	700	631	566	505	449	396	356
	6000	568	503	442	386	332	283	245
	8000	442	381	325	271	222	175	139
460	0	1055	972	895	823	756	693	646
	2000	901	824	752	685	622	564	519
	4000	756	684	617	554	496	441	399
	6000	619	551	489	430	375	324	285
	8000	489	426	367	312	261	212	175
440	0	1128	1041	961	886	817	752	703
	2000	968	887	813	743	678	617	571
	4000	817	742	672	607	547	490	447
	6000	675	605	540	479	422	369	328
	8000	540	474	413	357	303	253	215

5.2.5.4 Landing Configuration Climb Associated conditions:

Power: Full Throttle

Airspeed: 60 KIAS

Flap: Land

Sea Level Gradient of Climb: 6.8% (1:14.6)



5.3 ADDITIONAL INFORMATION

5.3.1 Cruise.

This Section is provided By JABIRU for information purposes. It is not CASA Approved

The JABIRU 220 engine has an altitude compensating carburettor which ensures that the fuel flow is constant at all operating altitudes. This feature has been examined by flight testing, and verified for altitudes between sea level and 5000 ft.

RPM	Fuel Flow	TAS
	(litre/hr)	(knots)
2600	10.7	80
2700	12.1	87
2800	13.0	95
2900	14.3	100
3000	16.1	103
3100	21.0	107
Full Power	25.6	120

NOTE

The JABIRU 2200 engine has an altitude compensating carburettor which provides for a fuel flow that is constant at all operating altitudes. This feature has been examined by flight testing, and verified for altitudes between sea level and 5000 ft. Fuel flow values have not been verified above 5,000 ft therefore pilots will need to monitor fuel flows to ensure accuracy when operating above that altitude.

For flight planning purposes when the flight is above 5,000 ft, pilots should program a fuel burn which is for the next highest rpm range in the table above.

5.3.2 Endurance

This Section is provided By JABIRU for information purposes. It is not CASA Approved

Aircraft endurance can be calculated using the information presented in paragraph 5.3.1 "Cruise" above. When calculating endurance, an allowance should be made for engine start, taxi, take-off and climb. IN normal circumstances a total allowance of 5-litres for these would be adequate. This allowance should be subtracted from the actual fuel on board prior to flight. i.e.

Fuel on Board – Allowance = Fuel assumed for endurance calculations.



5.3.3 Balked Landing Climb

Conditions

Power: Full Throttle
Flap: Full Down
Airspeed: 53-KIAS
Weight: 540-kg

		Rate of Climb (ft/min)						
Weight (kg)	Pressure Altitude (ft)	Outside Air Temperature (degC)						
		-20	-10	0	10	20	30	38
540	0	795	723	656	594	536	481	440
	2000	662	595	532	474	419	368	329
	4000	536	473	414	360	308	260	224
	6000	416	357	302	251	203	157	123
	8000	302	247	195	147	101	59	26

5.3.4 Performance Effects of Dirt / Insects

While normal in-service dirt build-up and insect residue does not significantly affect performance, in extreme cases, performance can be reduced. It is therefore recommended that the aircraft is maintained in a clean condition.

When flying with heavy insect contamination or in rain the following factors must be considered:

- Increase landing approach speed by 5 KIAS
- Take-off distances may increase by up to 50-meters
- Climb performance may be reduced by up to 50-ft/min with heavy insect contamination

5.3.5 Demonstrated Crosswind Performance

14 Kts

5.3.6 Noise Data

The aircraft has been approved to operate in Australia under a noise permit issued by Air Services Australia



CASA APPROVED

Jabiru Aircraft
Model J160-C

SECTION 5
PERFORMANCE

This Page Intentionally Left Blank



SECTION 6

WEIGHT AND BALANCE / EQUIPMENT LIST

TABLE OF CONTENTS

Paragraph		Page
6.1	GENERAL	6-2
6.1.1	Aircraft Weighing Procedures	6-3
6.2	AIRCRAFT WEIGHT	6-5
6.2.1	Weight and Balance Record	6-5
6.3	LOADING SYSTEM.....	6-8
6.3.1	Baggage Zones	6-8
6.3.2	Trim Sheet.....	6-9
6.3.3	Allowable Loading Conditions.....	6-10
6.3.4	Baggage Area.....	6-14
6.4	EQUIPMENT LIST.....	6-15



6.1 GENERAL

This section provides the current empty/basic weight and describes the procedure for establishing the basic empty weight and moment of the aircraft. Procedures for calculating the weight and moment for various operations are also provided. A list of all equipment available from the manufacturer is included in the equipment list.

Each item of equipment fitted to the aircraft when originally delivered from the factory is indicated in the equipment list. These items are all included in the empty/basic weight of the aircraft as delivered. Any subsequent changes to the equipment fit must be recorded and the empty/basic weight and moment data amended as required by the appropriate regulations applicable in the particular country of registration.

It is the responsibility of the pilot to ensure that the aircraft is loaded correctly.



6.1.1 Aircraft Weighing Procedures

1. Preparation

- (a) Drain all fuel from the aircraft using the fuel drain points as required to ensure that **all the fuel** is removed, including that in the sump tank.
- (b) Service engine oil as required to obtain a normal full indication.
- (c) Raise flaps to the fully retracted position.
- (d) Place all control surfaces in a neutral position.
- (e) Ensure that any equipment, loose items etc. that are not considered to be part of the aircraft are removed.

2. Jacking and Levelling

NOTE

The following procedure assumes that a conventional aircraft weighing kit utilising individual electronic wheel load pads under each wheel is used to weigh the aircraft. If such a system is not available appropriate variations to the procedures will be required.

- (a) Roll or lift the aircraft onto the weighing pads.
- (b) Chock the wheels to prevent the aircraft from rolling. DO NOT use the park brake as this can lead to inaccurate readings.
- (c) Level the aircraft. Use light packers under wheels to change the aircraft's attitude.

NOTE

The aircraft's longitudinal level datum is the lower rim of the pilot's side door frame.

3. Weighing

With the aircraft level, record the weight shown for each wheel making any adjustments required for zero error or cell calibration.

4. Measuring

With the aircraft still level, drop a plumb bob from the leading edge of the right wing to the ground. Drop a second plumb bob from the right wing. Both plumb lines must be approximately 300mm (1 foot) outboard of the main wheels. Use a string line or chalk line to mark a straight line between the points placed above.

Measure from this line to each of the main wheels and to both sides of the nose wheel. Note that the nose wheel distances are taken as negative for the purposes of calculation.

5. Calculation

Use the weights and the measurement obtained to calculate the Empty Weight and C.G. The sample form given in Figure 6-1 may be used to assist in correctly recording and calculating these weights.

NOTE

Empty weight includes unusable fuel and full oil

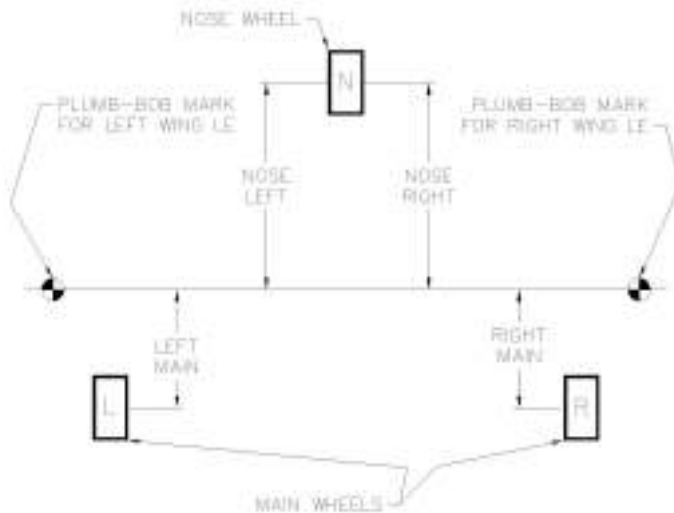


Figure 6.1.1 – Weighing Aircraft

Aircraft Registration: _____

Date: _____

MEASURED DATA

Wheel	Distance (mm)	Reading (kg)	Adjustment (±kg)	Nett Load (kg)
Left Main	D _L =			L =
Right Main	D _R =			R =
Nose	D _N = (Average) -			N =
Sum of Nett Loads				S =

$$X = \text{CG position} = (L \times D_L + R \times D_R + N \times D_N) \div S$$

Remember – Nose wheel distances are negative!

i.e. $X = (_ \times _ + _ \times _ + _ \times _) \div _$

X = _____mm

Item	Weight (kg)	Arm (mm)	Moment (kg.mm)
Aircraft as weighed	S =	X =	
Add unusable fuel	(Header Tank) 4kg	304	1216
Empty Weight			



6.2 AIRCRAFT WEIGHT

6.2.1 Weight and Balance Record

Subsequent to each weighing and the establishment of new Empty and Basic Weight data, the revised data is to be recorded in the "Summary of Empty Weight Changes" section of the airframe log book. Additionally this section of the airframe log book is to be used to calculate and record any subsequent changes to the weight and balance data that may occur as a result of the installation or removal of equipment, or of changes to the aircraft structure.

The "Weight and Balance Record" (Figure 6-2) is to be amended after every change in weight and balance so that a continuous history of the current weight and balance data is available to the pilot. The latest entry will therefore be the current data.



Jabiru Aircraft
Model J160-C

SECTION 6
WEIGHT AND BALANCE

INSERT FIGURE 6.2 FROM WEIGHING SPREADSHEET IN PLACE OF THIS PAGE



Jabiru Aircraft
Model J160-C

SECTION 6
WEIGHT AND BALANCE

INSERT WEIGHT & BALANCE RECORD FROM WEIGHING SPREADSHEET IN PLACE OF THIS PAGE.



6.3 LOADING SYSTEM

The Loading Trim Sheets on the following pages will assist the pilot in ensuring that the J160-C is operated within the prescribed weight and centre of gravity limitations. The chart is a graphic representation of the weight and balance calculations for the aircraft. It performs two functions – the vertical scales on the right hand side of the chart provide a graphical method to calculate the operating weights of the aircraft, while the horizontal scales and the crew index chart at the top of the chart provide a graphical method to calculate the cg positions.

The aircraft is loaded correctly, only if **BOTH** the **zero fuel** and the **takeoff** cases fall inside the boundary line on the graph.

The chart is based on an aircraft “EMPTY WEIGHT TRIM INDEX” which is calculated using the following formula:

$$\text{Empty Weight Trim Index} = \frac{\{(Aircraft Empty Weight) * (Empty Weight Arm)\}}{1000}$$

Example Trim Index Calculation:

Aircraft Empty Weight	=	275-kg
Aircraft Empty Weight Arm	=	180-mm aft of datum
Empty Weight Trim Index	=	(275 x 180) / 1000
	=	49.5

6.3.1 Baggage Zones

The cabin has one baggage zone:

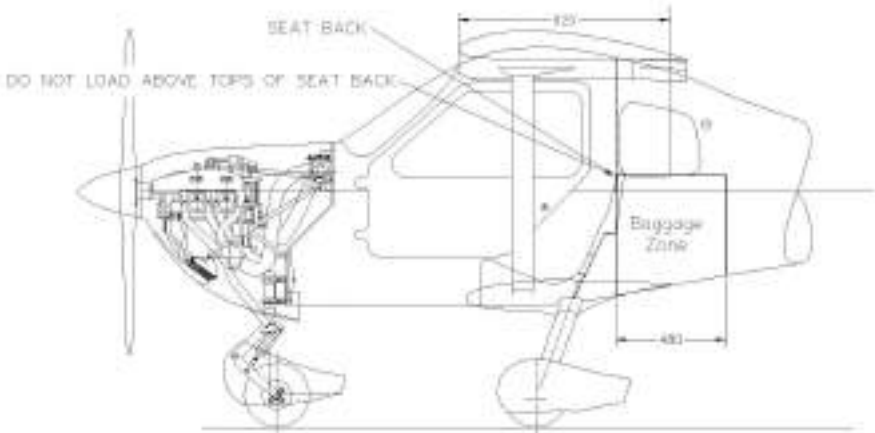


Figure 6.3.1 – Baggage Zones

Baggage is restrained using the straps fitted in the baggage areas.



6.3.2 Trim Sheet

Two trim sheets are provided – one in metric units and the other in imperial units. An example loading has been worked through for reference.

Calculate Aircraft Weights

- 1-1 Use the Aircraft Empty Weight obtained from the latest aircraft weighing records to enter the vertical “Aircraft Empty Weight Scale” on right hand side of the chart.
- 1-2 Move horizontally to the left into the next scale which is the “Crew Weight” Scale.
- 1-3 Move vertically downward one line on this scale for each 10-kg of weight that is placed on the front seats, and mark a point.
- 1-4 Move horizontally to the left from the point made in Step 1-3 to enter the next scale which is the “Baggage Weight” Scale.
- 1-5 Move vertically downward one line on this scale for each 5-kg of weight that is placed in Baggage Zone and mark a point.
- 1-6 Move horizontally to the left from the point made in Step 1-5 to enter the next scale which is the “Fuel Quantity” Scale and mark a point, This point is the “Zero Fuel Weight Reference Point”
- 1-7 Move Horizontally to the left of the “Zero Fuel Reference Point” and Mark a “Zero Fuel Weight Line” across the “Aircraft Trim Condition” Graph.
- 1-8 From the “Zero Fuel Point” on the “Fuel Quantity Scale” (marked in Step 1-8), move vertically downward one line for each 10-*litres* of fuel being carried at the take-off condition. Mark this “Take-Off Fuel Point” on the scale.
- 1-9 Move horizontally to the left, and mark a “Take-Off Fuel Weight Line” across the “Aircraft Trim Condition” graph.



Calculating the Operating CG Locations

- 2-1. Take the calculated Empty Weight Trim Index and mark it's position on the Aircraft Index Units Ladder at the top of the sheet.
- 2-2 Draw a vertical line down from the point marked above to intersect with a sloping line in the "Crew Index Units" scale and mark this point.
- 2-3 Calculate the weight of the crew and round this value to the nearest 10-kg.
- 2-4 Move horizontally to the right from the point marked in Step 2-2 one line for each 10-kg of load calculated. (i.e. 60-kg = 6 lines) and mark a point at this location.
- 2-5 Draw a vertical line down from the point marked above to intersect with a sloping line in the Baggage Area scale and mark this point.
- 2-6 Calculate the weight that will be placed Baggage Area and round this value to the nearest 5-kg.
- 2-7 Move horizontally to the right from the point marked in Step 2-5 one line for each 5-kg of load calculated. (i.e. 20-kg = 4 lines) and mark a point at this location.
- 2-8 Drop a vertical line down from the point marked in Step 2-10 to intersect a sloping line in "Fuel Chart", and mark a point at this location.
- 2-9 Continue the Vertical Line began in Step 2-11 down to intersect with the "Zero Fuel Weight Line" drawn in Step 1-9. mark this point as the "ZERO FUEL Condition"
- 2-10 Move horizontally to the right from the point marked in Step 2-11 in the "Take-Off Fuel Box", one line for each 10 liters of take-off fuel, and mark this point.
- 2-11 Move vertically downward from the take-off fuel point marked in Step 2-13 to intersect with the "Take-Off Fuel Weight Line" marked in Step 1-9. Mark this point the "Take-Off Condition"

6.3.3 Allowable Loading Conditions

An allowable loading condition exists when both the "Zero Fuel Condition", and the "Take-Off Condition" fall with the area bounded by the Line in the Aircraft Trim Conditions Box.

For reference, the example below shows two 90kg people, 5kg in Baggage Zone and 60L of fuel. The aircraft's starting Index Unit is 49.5 at 275kg.



EXAMPLE

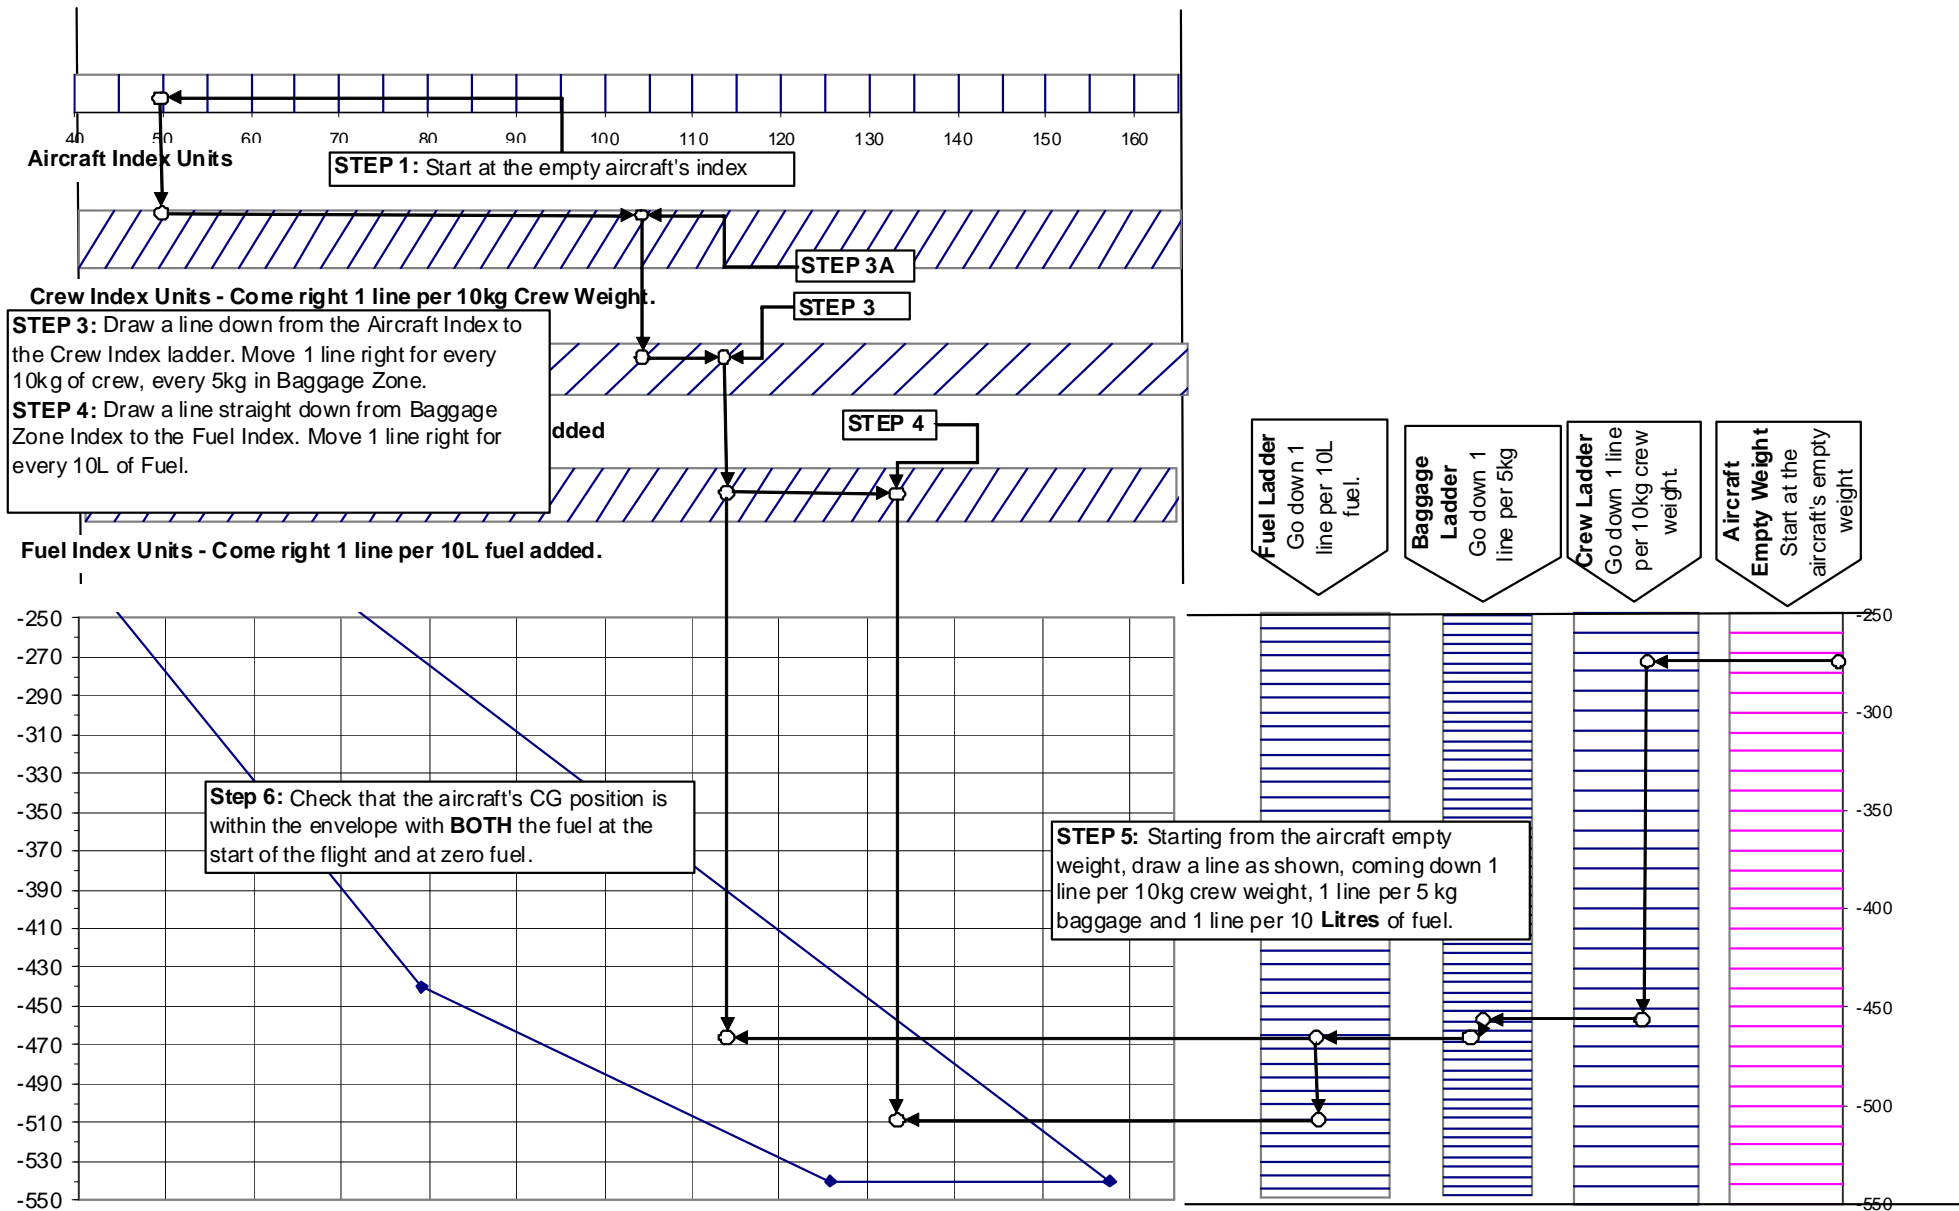


Figure 6-3a – Loading Trim Sheet Example (Metric Units)



ORIGINAL


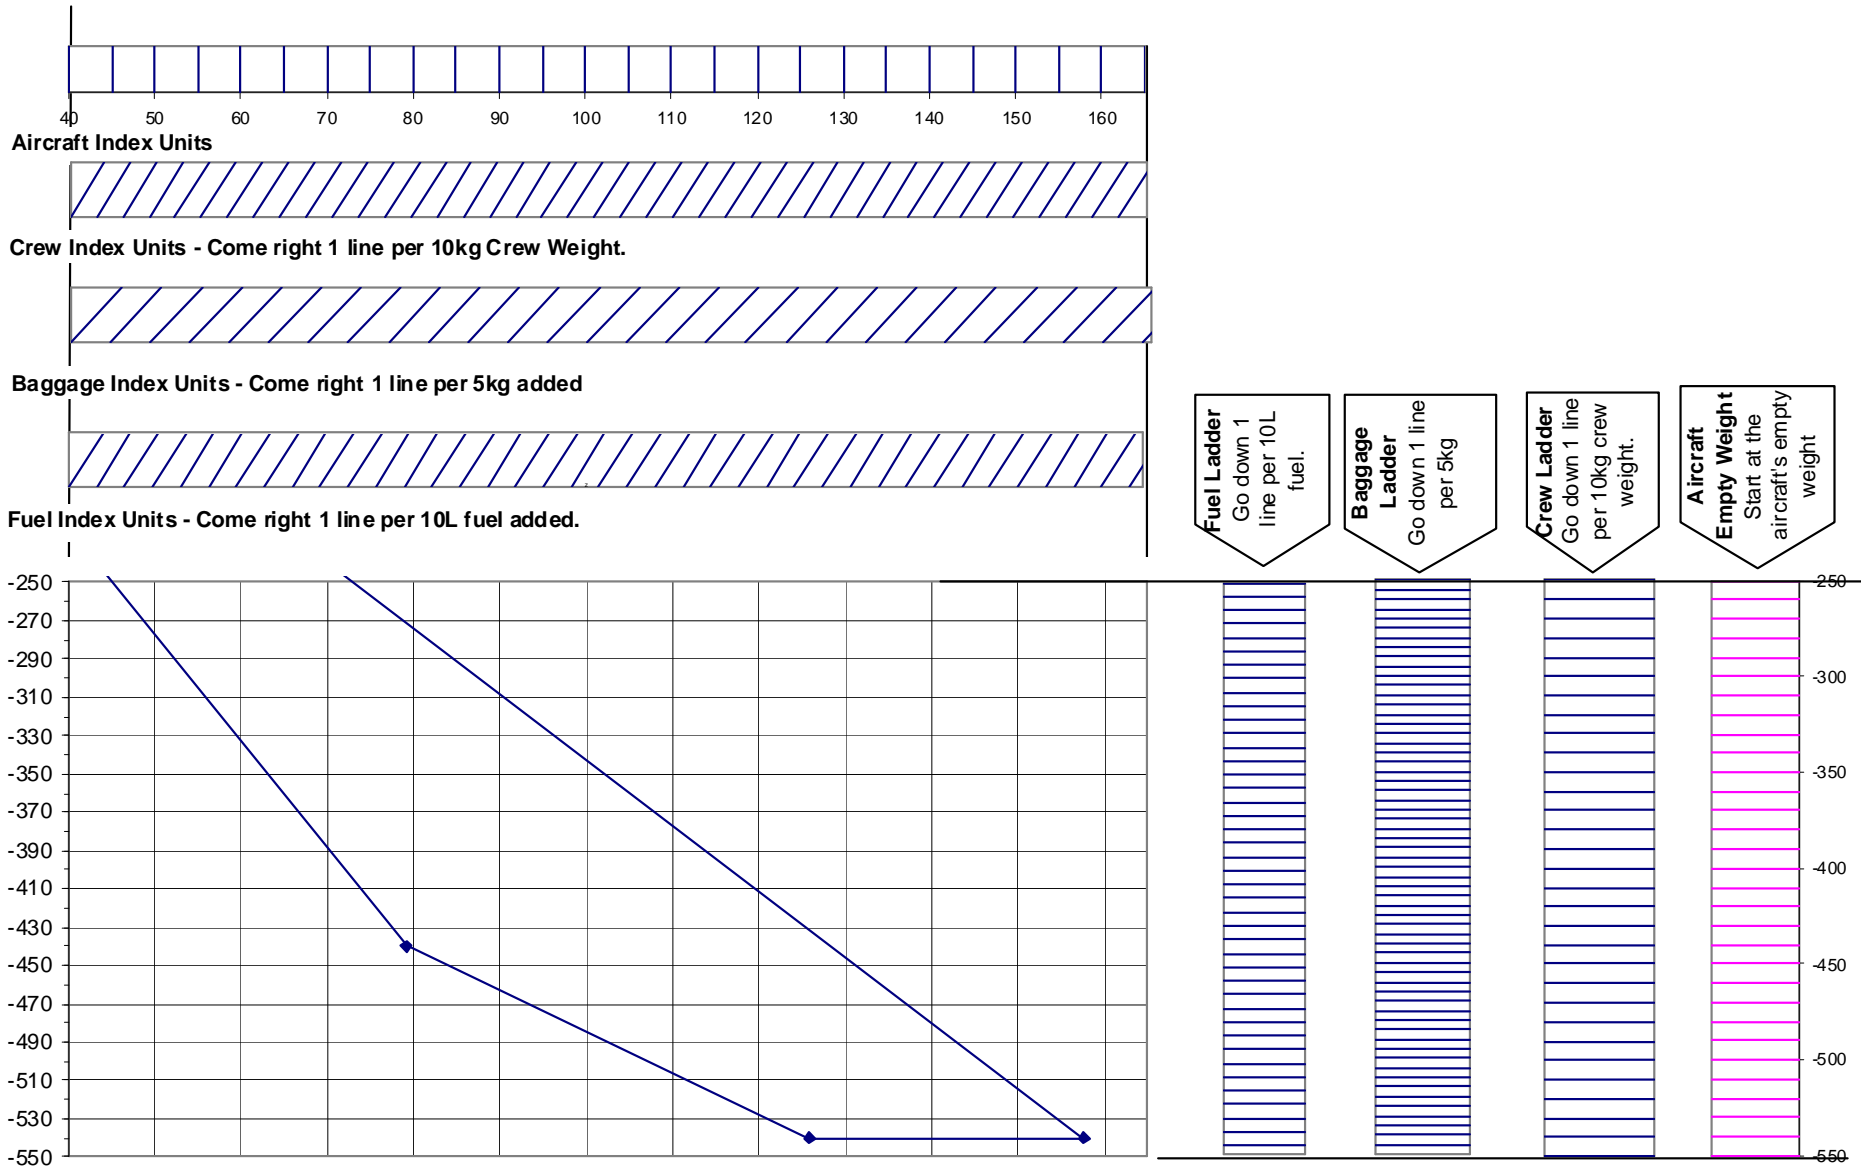


Figure 6.3b – Blank Trim Sheet – Metric Units



ORIGINAL

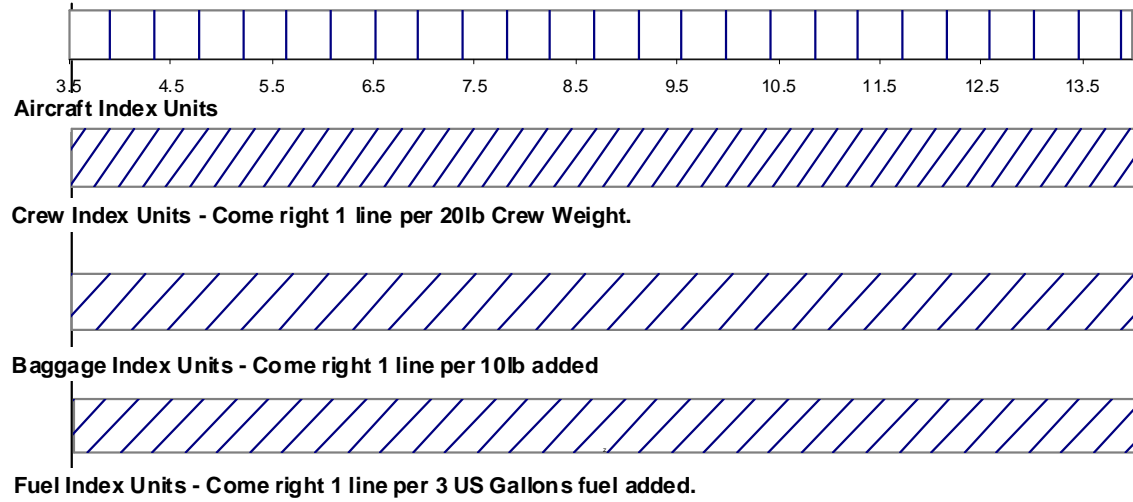

Fuel Ladder
Go down 1 line per 3 US Gallons fuel.

Baggage Ladder
Go down 1 line per 10lb

Crew Ladder
Go down 1 line per 20lb crew weight.

Aircraft Empty Weight
Start at the aircraft's empty weight

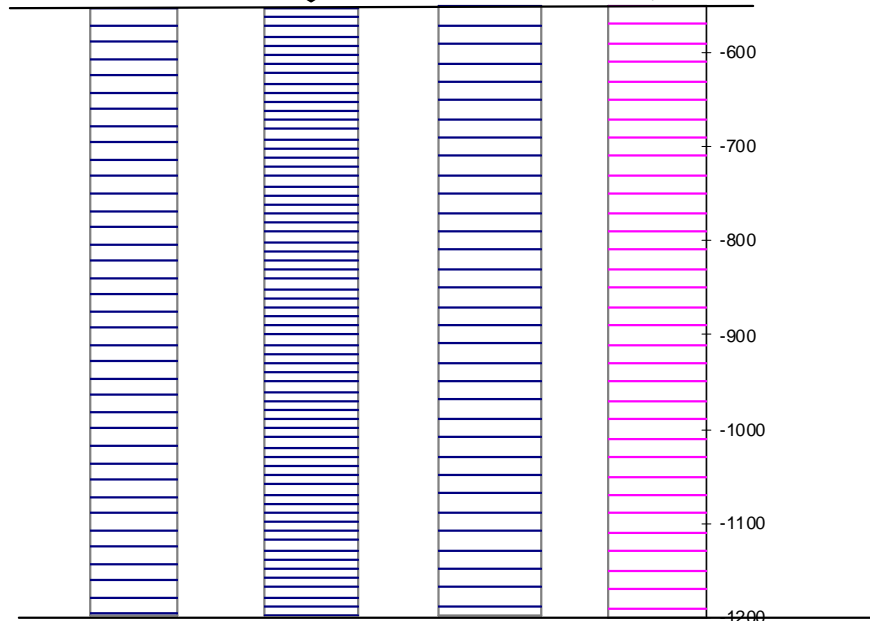
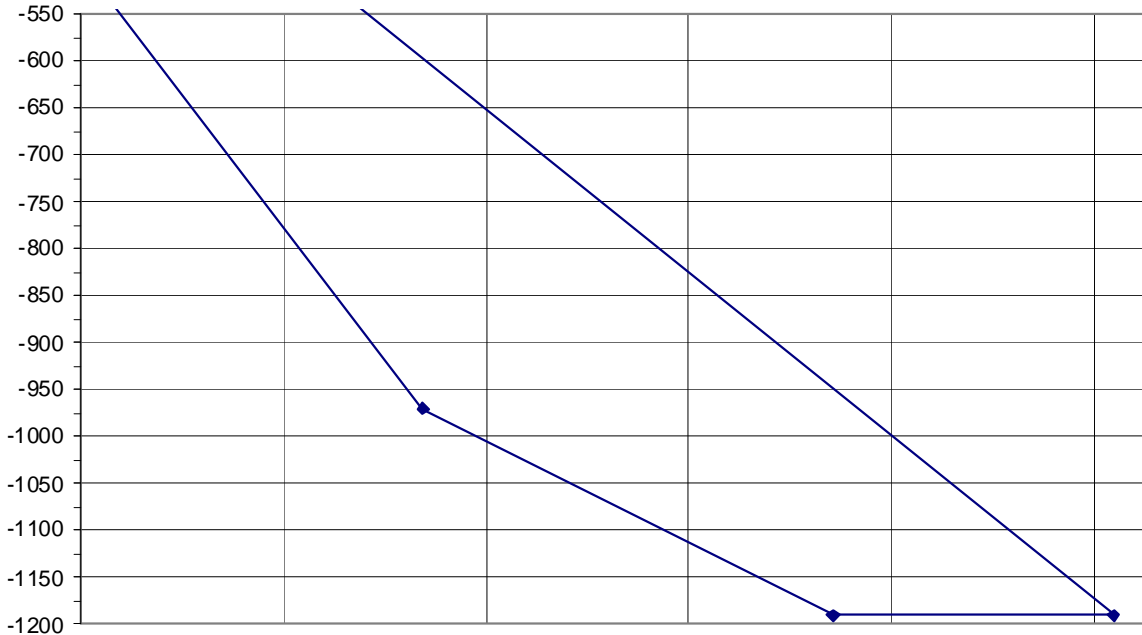


Figure 6.3c – Blank Trim Sheet – Imperial Units

6.3.4 Baggage Area

The restraint of freight in the cabin baggage shelf area is achieved through the use of baggage straps.

6.4 CENTRE OF GRAVITY LIMITS

Forward Limit:	180-mm (7.09", 18.2%MAC) aft of datum up to & including 440 kg (970lb) 233-mm (9.17", 23.5%MAC) aft of datum at 540kg (1190lb) Linear variation between points.
Aft Limit	292-mm (11.50", 29.5%) aft of datum at all weights
Datum	Wing Leading Edge
Leveling Means	
Longitudinal	Spirit Level placed on the trim control lever decal.
Lateral	Spirit Level placed across the upper engine mount attachment bolts.
Arms	
Arm for Front Seat Station	297-mm aft of datum
Arm for Baggage Zone	920-mm aft of datum
Header Tank Fuel Station	840-mm aft of datum
Wing Fuel Station	451-mm aft of datum

Table 6.4 – Centre of Gravity Limits

6.5 EQUIPMENT LIST

The following equipment list provides details of equipment that is fitted as standard in the J160-C aircraft, or is available from the manufacturer as an option. A separate list of all equipment fitted in each particular J160 is provided in the aircraft log book.

The columns in the equipment list contain the following information:

- 1. Opt.Code** An **O** indicates that the item of equipment is available as an optional fitment from the manufacturer.
- 2. Description** Description of the item of equipment and the relevant manufacturer's or Jabiru Aircraft part number.
- 3. Weight** Weight of the item of equipment in kilograms (and pounds).
- 4. Arm** Arm of the item of equipment in millimetres (and inches).

Unless otherwise indicated, the installation certification basis for the equipment included in this list is the aircraft's approved type design. Equipment fitted in the field after delivery must be fitted in accordance with approved data. This can be approved data obtained from the manufacturer, or data approved locally in accordance with appropriate regulations.

Opt. Code	Description	Weight kg (lb)	Arm mm (in)
	Firewall Fwd		
	Engine: Jabiru 2200. Includes starter, alternator, carburettor, muffler, spark plugs, prop flange extension and oil filter assembly	61kg (135lb)	-1085mm (-42.72in)
	Oil Cooler (empty): P/No. PH4A015N	0.5kg (1.1lb)	-1050mm (-41.34in)
	Propeller: P/No. C000242-60D42P or 4A401A0D	1.7kg (3.7lb)	-1420mm (-55.91in)
	Spinner Assembly: 4A189A0D	0.6kg (1.3lb)	-1467mm (-57.76in)
	Instruments		
	Electronic Turn Co-ordinator	1.0kg (2.2lb)	-266mm (-10.47in)
	Airspeed Indicator	0.5kg (1.1lb)	-266mm (-10.47in)
	Altimeter	0.8kg (1.8lb)	-266mm (-10.47in)
	Vertical Speed Indicator	0.6kg (1.3lb)	-266mm (-10.47in)
O	EFIS: Dynon EFIS-D10A	0.7kg (1.5lb)	-266mm (-10.47in)
	LCD Fuel Gauge (where equipped)	0.1kg (0.2lb)	-266mm (-10.47in)

Opt. Code	Description	Weight kg (lb)	Arm mm (in)
O	Header tank low level warning light	0.1kg (0.2lb)	-266mm (-10.47in)
	Fuel Pressure Indicator (UMA 1-1¼")	0.1kg (0.2lb)	-266mm (-10.47in)
	Oil Pressure Gauge	0.2kg (0.4lb)	-266mm (-10.47in)
	Oil Temperature Gauge	0.2kg (0.4lb)	-266mm (-10.47in)
	Tachometer	0.4kg (0.9lb)	-266mm (-10.47in)
	Cylinder Head Temperature	0.2kg (0.4lb)	-266mm (-10.47in)
O	Exhaust Gas Temperature	0.2kg (0.4lb)	-266mm (-10.47in)
O	Outside Air Temperature	0.1kg (0.2lb)	-216mm (-8.50in)
	Electrical Equipment		
	Battery (Odyssey PC625)	6.7kg (14.8lb)	-675mm (-26.57in)
	Intercom	0.4kg (0.9lb)	-266mm (-10.47in)
	VHF COMM #1:	0.5kg (1.1lb)	-266mm (-10.47in)
O	VHF COMM #2:	0.5kg (1.1lb)	-266mm (-10.47in)
O	Transponder	0.7kg (1.5lb)	-266mm (-10.47in)
	Headsets	0.6kg (1.3lb)	304mm (11.97in)
O	Ameri-King Altitude Encoder (AK-350)	0.8kg (1.8lb)	-500mm (-19.69in)
	Miscellaneous		
	Baggage Restraint Straps (Each)	0.1kg (0.2lb)	804mm (31.65in)
	Seat Covers Cloth:	1.0kg (2.2lb)	304mm (11.97in)
O	Seat Covers Sheepskin	1.5kg (3.3lb)	304mm (11.97in)
O	Tool Kit	1.5kg (3.3lb)	804mm (31.65in)
	Flight Manual	0.4kg (0.9lb)	-210mm (-8.27in)
	Compass	0.4kg (0.9lb)	-266mm (-10.47in)

Opt. Code	Description	Weight kg (lb)	Arm mm (in)
	Door Pockets	0.1kg (0.2lb)	-210mm (-8.27in)
	Additions/Deletions		



SECTION 7

AIRCRAFT & SYSTEMS DESCRIPTION

TABLE OF CONTENTS

Paragraph		Page
7.1	INTRODUCTION.....	7-2
7.2	AIRFRAME.....	7-2
7.3	FLIGHT CONTROLS.....	7-2
	7.3.1 Trim System.....	7-2
	7.3.2 Adjustable rudder pedals.....	7-2
7.4	INSTRUMENT PANEL.....	7-3
7.5	GROUND CONTROL.....	7-5
7.6	WING FLAP SYSTEM.....	7-5
7.7	UNDERCARRIAGE SYSTEM.....	7-5
7.8	SEATS.....	7-5
7.9	OCCUPANT RESTRAINT HARNESES.....	7-5
7.10	BAGGAGE SHELF.....	7-5
7.11	ENTRANCE DOORS.....	7-5
7.12	ENGINE.....	7-5
	7.12.1 Engine Controls.....	7-6
	7.12.2 Engine Instruments.....	7-6
	7.12.3 Engine Oil System.....	7-6
	7.12.4 New Engine Break-in and Operation.....	7-7
	7.12.5 Ignition System.....	7-7
	7.12.6 Starting System.....	7-7
	7.12.7 Air Induction System.....	7-7
	7.12.8 Exhaust System.....	7-7
	7.12.9 Cooling System.....	7-8
7.13	PROPELLER.....	7-8
7.14	FUEL SYSTEM.....	7-8
7.15	BRAKE SYSTEM.....	7-12
7.16	ELECTRICAL SYSTEM.....	7-12
7.17	COCKPIT VENTILATION.....	7-15
7.18	PITOT-STATIC SYSTEM AND INSTRUMENTS.....	7-15
	7.18.1 Airspeed Indicator.....	7-15
	7.18.2 Altimeter.....	7-15
	7.18.3 Vertical Speed Indicator.....	7-15
7.19	STALL WARNING SYSTEM.....	7-15
7.20	AVIONICS.....	7-15



7.1 INTRODUCTION

This section provides descriptions of the aircraft and its systems as well as methods of operation where appropriate. Optional equipment that may be installed is described in Section 9.

7.2 AIRFRAME

The J160 is a two place, single engine, high wing monoplane GRP construction. The aircraft is designed for pilot training and recreational type operations.

WINGS: The wings are of GRP skin construction, and are externally braced with a streamline section strut that bolts to the lower fuselage members and wing spar fittings. The main fuel tanks are incorporated in the inboard section of the wings between the spar and the rear of the wing. The ailerons are controlled via push-pull Teleflex cables. The wing flaps are powered by an electric motor driving through a mechanical linkage.

FUSELAGE: The fuselage is of GRP construction. The fixed horizontal and vertical tail surfaces are bonded to the structure.

EMPENNAGE: The empennage consists of the fin, rudder, horizontal stabiliser, and elevators. All are constructed of GRP.

7.3 FLIGHT CONTROLS

The aircraft's flight control system consists of conventional aileron, rudder and elevator control surfaces. These are manually operated by push-pull Teleflex cables. The control column is a centrally mounted stick, with separate handgrip for each pilot. The control column actuates the ailerons and elevators in the conventional manner while the rudder pedals operate the rudder.

The aileron and elevator controls may be locked by securing the control column with the pilot's seat belt when the aircraft is parked on the ground. This will prevent damage to these systems by wind buffeting.

7.3.1 Trim System

The elevator trim control is controlled via levers mounted on either side of the cockpit centre console. The system consists of a cable operated system which uses springs connected to a friction lock to control the elevator control force. Selection of nose up trim pivots the trailing edge of the elevator upwards.

7.3.2 Adjustable rudder pedals.

J160-C aircraft have the option of fitting adjustable rudder pedals. These pedals have two positions, in and out. To adjust the pedals pull the ring on the side of the pedals (shown in Figure 1 and **Error! Reference source not found.**) to the side to release the pedal face. Move the pedal face to the desired location (in or out). When the pedal face is in the desired location, release the ring and move the pedal face around a little bit until the locking pin is felt to engage and the pedal face is locked in place.

CAUTION

Ensure pedals are locked in position before operating the aircraft. Do not attempt to adjust the pedal position while the aircraft is in motion.

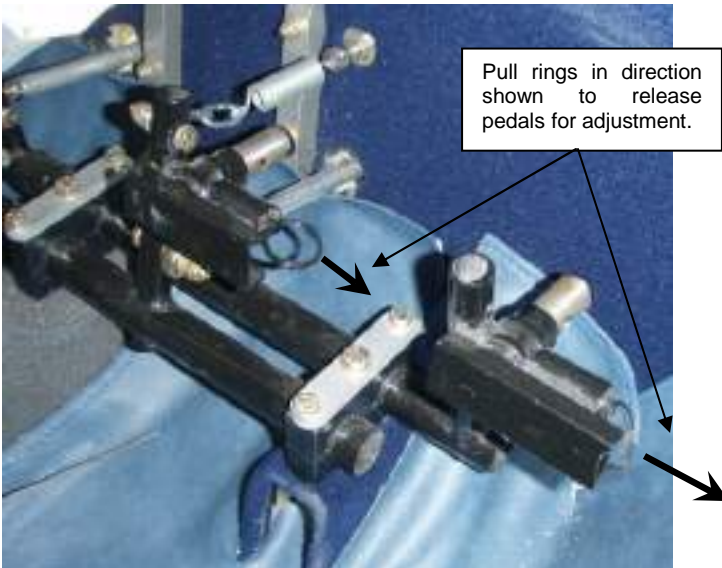


Figure 1: Right side pedals.

7.4 INSTRUMENT PANEL

Although the instrument panel spans the width of the cockpit, flight instruments are on the left hand side in front of the pilot. Radio and transponders are located in the upper panel close to the centre of the aircraft – offset slightly towards the pilot. The engine tachometer is located centrally on the lower section of the panel, while the other engine instruments are placed in a vertical row slightly to the right of the centre of the panel. Where electric fuel gauges are fitted they are located centrally – below the radios. The right side of the panel is left empty to allow owner's to fit their choice of GPS system or other instrumentation.

A push-pull throttle knob is located at either side of the panel. Pushing the knob forwards increases engine power.



7.5 GROUND CONTROL

The J160-C is fitted with mechanical linkage from the rudder pedals to the nose wheel. This gives ground steering control. The minimum turning radius is approximately 5m (or approximately 1m outboard of the wingtip). When shut down, the aircraft is easily manoeuvred on level ground by one person without the aid of special ground handling equipment.

7.6 WING FLAP SYSTEM

The wing flaps are of the single slotted type with three indicated positions; Up, Take-Off and Land. The position of the flaps is controlled manually by the pilot – a position indicator is fitted on the pilot's side "A" pillar (between the windscreen and the front of the door opening). The selected position can be easily confirmed by visual observation of the flaps.

The flap system is electrically actuated. The flaps are extended by mechanical force provided by the flap motor operating on a torque tube and push rod mechanism. The flap structure is of GRP material and has been designed to withstand all air loads within the approved operating envelope.

7.7 UNDERCARRIAGE SYSTEM

The main undercarriage is of GRP. Jabiru wheel and brake assemblies are fitted, using 500 x 6 6-ply tyres. The nose wheel undercarriage is a rubber compression spring – steering is via pushrods direct from the rudder pedals. The nose wheel is a Jabiru assembly with 500 x 6 6-ply tyre. Refer to Section 8 for the recommended tyre pressures.

7.8 SEATS

Seats in the J160-C are an integral part of the moulded structure. The seat base contains foam which is designed to crush in the event of an accident, absorbing energy from large vertical decelerations.

7.9 OCCUPANT RESTRAINT HARNESES

Both front seats are fitted with three point restraint harness.

7.10 BAGGAGE SHELF

The baggage storage shelf is located behind the seats. This shelf is fabricated from composite materials and also forms part of the fuel system header tank enclosure. Tie down points are provided on the sides of this shelf onto which baggage restraint straps can be attached. As the seat backs provide a barrier against forward movement of the baggage, items which are narrower than the full width of the shelf should be located centrally behind a seat back.

7.11 ENTRANCE DOORS

A forward opening cockpit door is fitted to each side of the aircraft. The door latch is a simple locking pin operated by a handle on both the inside and out. These doors also act as emergency exits.

Opening of the doors in flight is approved in an emergency such as for smoke or fume evacuation.

7.12 ENGINE

The engine is a four cylinder, horizontally opposed, air cooled, naturally aspirated Jabiru 2200B or 2200C, fitted with an altitude compensating carburettor. Both engines are rated by the manufacturer to 80 BHP at full throttle and 3300 RPM.



7.12.1 Engine Controls

Throttle

Engine power is controlled by a throttle located on the left and right sides of the instrument panel. It is readily identified by smooth black cylindrical knobs. The throttle operates in the conventional sense in that when fully forward the throttle is full open, and in the fully aft position, the throttle is closed.

Choke

The choke is a push-pull control located in the centre of the lower section of the instrument panel and is only used for engine starting. It is fitted with a black knob. The choke ON position is full back, and full forward is choke OFF, or normal.

Carburettor Heat

The carburettor heat control is a push-pull control located in the centre of the lower section of the instrument panel. With the control pushed fully forward (in), cold filtered air is selected. Fully aft (heat ON) selects heated filtered air from a muff around the exhaust pipes. The knob is a rectangular shape.

7.12.2 Engine Instruments

Engine operation is monitored by a tachometer, oil pressure and oil temperature, fuel pressure and cylinder head temperature gauges. These instruments are located in the instrument panel in front of the pilot and are marked with green arcs to indicate the normal operating range, yellow arcs to indicate precautionary ranges and red lines at the maximum/minimum allowable limits. These limits and gauge markings are also given in Section 2 of this manual.

7.12.3 Engine Oil System

Oil for engine lubrication is supplied from a sump at the bottom of the engine. The oil capacity of the engine is 2.3 litres (2.02 US quarts). Oil is drawn from the sump through an oil suction strainer screen into the engine driven oil pump. An adaptor on the engine underneath the oil filter directs oil through the oil cooler. On returning to the engine, the oil passes through the full flow replaceable element oil filter. The filtered oil then enters a pressure relief valve that regulates the engine oil pressure by allowing excessive oil to return to the sump, while the remaining oil under pressure is circulated to the various engine components for lubrication. Residual oil returns to the sump by gravity flow.

An oil filler cap/dipstick is located on the top of the engine and is accessible through an access door in the engine cowling. The dipstick is marked to show upper and lower oil level limits. To minimise possible loss of oil through the breather, filling the sump to the low mark on the dipstick instead of the high is sufficient for routine operations. The upper dipstick mark should be used for flights of 3 hours endurance or longer. For engine oil grade and specifications, refer to Section 2 of this manual. An oil pressure indicator is provided on the instrument panel.

WARNING

The oil level must be visible on the dip stick. Do not run the engine if the sump oil level is below the bottom of the dipstick.



7.12.4 New Engine Break-in and Operation

The engine has undergone a run-in at the factory and is ready for normal operation. It is however suggested that a minimum of 65% and preferably 75% power be used for cruising until a total of 50 hours has accumulated or until the oil consumption has stabilised. This will assist with proper seating of the rings and minimise the possibility of cylinder wall glazing. This procedure also applies following cylinder replacement or top overhaul of one or more cylinders.

CAUTION

Straight mineral oil should be used during the break-in period. Refer to Section 2 of this manual for specifications.

7.12.5 Ignition System

Engine ignition is provided by two engine driven transistorised magneto coils, each running a single spark plug in each cylinder. Normal operation is conducted with both magnetos on due to the more complete burning of the fuel-air mixture with dual ignition sources. The individual magnetos are selected using the two ON – OFF toggle switches located on the left hand side of the instrument panel.

7.12.6 Starting System

The electrically driven starter motor is mounted at the rear of the engine. When energised, the starter motor pinion engages a ring gear that is fitted to the flywheel. When the master switch is on, pushing the start button energises the starter motor.

If the engine turns at less than 300rpm no spark will be generated and it will not fire. The engine requires choke to start when cold. When hot it does not require choke and may be started with the throttle just cracked open. Experience with the individual engine will enable the pilot to make the correct judgment on this. Weak intermittent firing followed by puffs of black smoke from the exhausts usually indicates excess choke or flooding. If the engine is flooded, leave it to stand for approximately 10 minutes before attempting re-start.

7.12.7 Air Induction System

The engine induction air normally enters through a NACA duct on the left side of the lower engine cowl. The air is then directed to a filter box where dust and other contaminants are removed by a replaceable paper filter element. On the outlet side of the filter box there is a flapper valve which allows the pilot to select normal cold induction air or hot induction air which is drawn through the muff fitted to the muffler. Hot air is not filtered – therefore care must be taken when choosing run up positions to minimise dust ingestion while carb heat is selected ON.

7.12.8 Exhaust System

Each cylinder feeds directly to the muffler via an extractor pipe. The extractors fit to the head using a metal-metal gasket-less connection which also allows a degree of freedom to the extractor position. A muff is fitted to the muffler to supply hot air for the carburettor heat system. A separate hot air muff is fitted to the tail pipe to provide air for the cabin heat. The exhaust tailpipe exits out through the lower left side of the engine cowl.



7.12.9 Cooling System

Ram air for engine cooling enters through two intakes at the front of the engine cowl. The cooling air is directed around the cylinders and other areas of the engine by appropriate baffles and is then exhausted through an opening in the rear of the lower cowl. Air for oil system cooling enters the lower intake chamber and flows through an oil cooler mounted below the sump. The air then exhausts out the lower cowl opening with the engine cooling air.

7.13 PROPELLER

The aircraft is equipped with a two blade Jabiru propeller. The propeller is made of 3 laminations of hoop pine sheathed in GRP. The propeller has a diameter of 60" and a pitch of 42". A Urethane leading edge is moulded into the propeller to provide protection from damage caused by small rock strikes, operating in the rain etc.

7.14 FUEL SYSTEM

The aircraft has a fuel tank in the inboard section of each wing, and a small header tank which is located in a sealed compartment underneath the baggage shelf. The wing tanks gravity feed into the header tank and there is no provision for the pilot to select and/or isolate a particular wing tank. A single shut off valve is provided to stop all fuel flow to the engine. Figures 7.14.3 and 7.14.4 are schematic diagrams of the fuel system.

The engine is equipped with a Bing altitude compensating carburettor. There is no mixture control adjustment available to the pilot. A choke is provided for engine starting purposes only

Two slightly different systems are used depending on the age of the aircraft – details of both are presented below.

System #1: Fuel gravity feeds from the front and rear inboard corner of each tank. The two delivery pipes from each side join together in the fuselage wall below the wing. Then the single delivery line continues to the header tank under the passenger's side of the baggage shelf. Breathers for the wing tanks run from the outboard end of the tank and are connected with lines that run between the tanks. The header tank breather is also connected into this breather line.

System #2: Fuel gravity feeds from the front and rear inboard corner of each tank. The two delivery pipes and the vent line for each wing tank run directly to the header tank located under the passenger's side of the baggage shelf behind the seats.

Both Systems: From the sump tank fuel flows through an electric boost pump then forward through the filter and shutoff valve to the engine driven mechanical fuel pump and carburettor. All wing and sump tank outlets have finger filters. The three fuel tanks are fitted with fuel drains.

The wing tanks are fitted with vented caps located at the outboard end of the tank. The vent for each cap is directional and provides a small pressure head to the tanks. This system ensures that the air space pressure in each tank is the same, minimising uneven fuel feed rates.

The J160-C may use either two fuel sight gauges (one in each wing root) or two electric fuel gauges on the instrument panel to show fluid levels in each wing tank. The sump tank does not have a fuel gauge as its contents are deemed to be unusable and should not to be considered for flight planning. As an option, a low level warning light may be installed in the header tank.

Refer to Figures 7.14.3 and 7.14.4 for schematic drawings of the system.



NOTE

As ground & flight attitudes are essentially the same, fuel gauge indications are valid in both cases

NOTE

Flying “1 ball” out of balance (see Figure 7.14.1) causes the fuel in the tanks to slosh in to one side by an angle of about 8°. This leads to uneven fuel feeding – 1 tank emptying before the other. In extreme cases, this can cause fuel starvation & engine stoppage while there is significant fuel remaining in one wing tank. Care must be taken to fly the aircraft in balance at all times.

CAUTION

In the unusual condition where the pilot suspects that one wing tank is feeding and the other wing tank is not, the pilot must consider the fuel in the non-feeding tank as “unusable” and manage the flight accordingly.

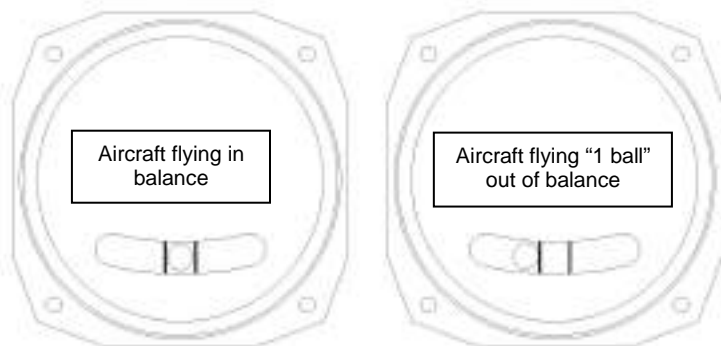


Figure 7.14.1 – Balance Balls

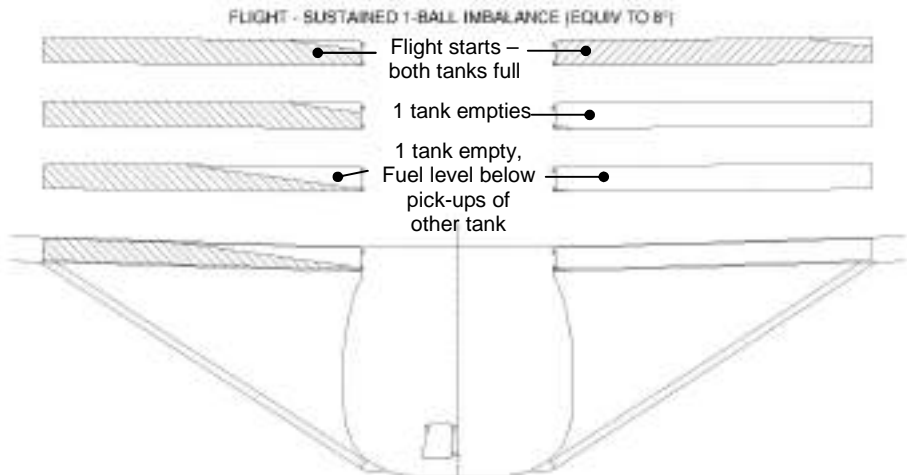


Figure 7.14.2 – Fuel Levels with 8° slope

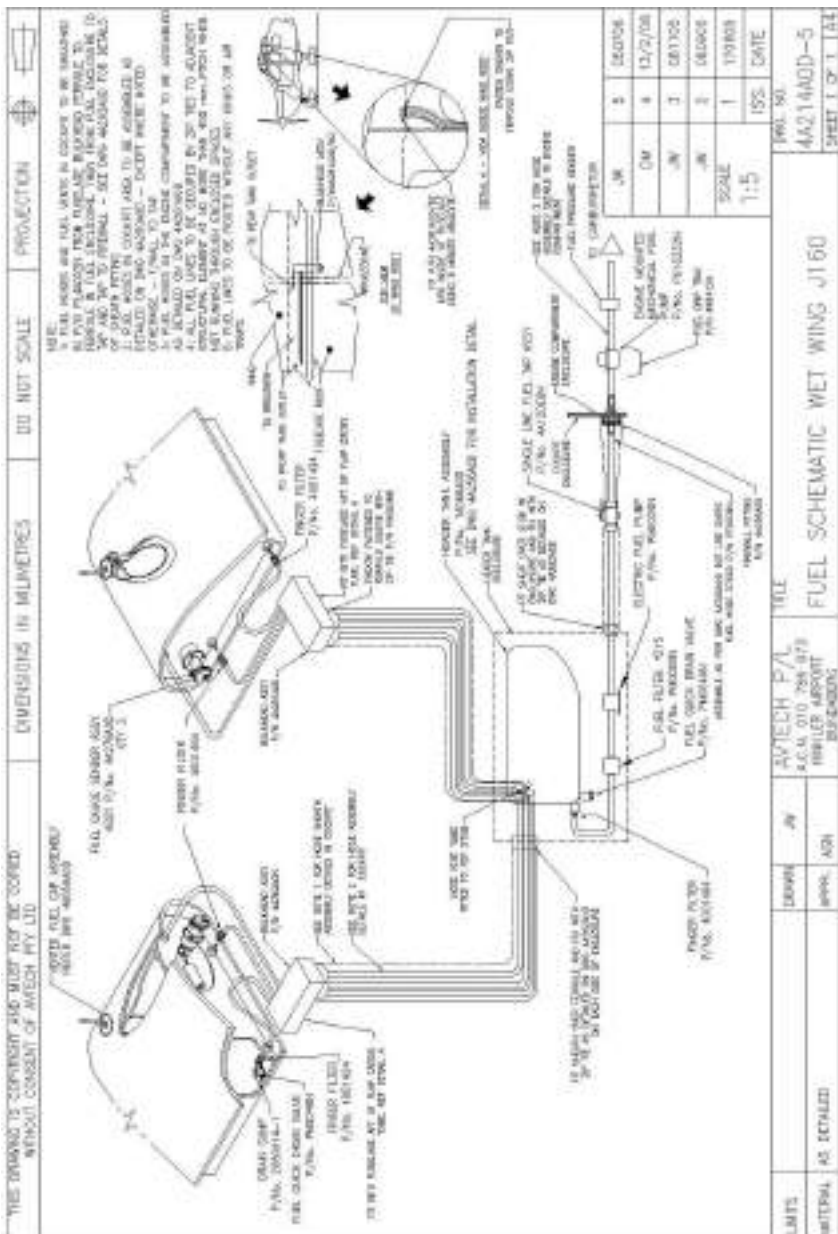


Figure 7.14.4 – Fuel System Schematic #2



7.15 BRAKE SYSTEM

The aircraft has a single disc, hydraulically actuated brake on each main undercarriage wheel. Each brake is connected by a hydraulic line to a master cylinder fitted to the front of the centre console in the cabin. The wheel brakes operate simultaneously. When the aircraft is parked, the parking brake is set by pulling the brakes on and engaging the park brake cam fitted to the lever. To release the park brake, pull the brake lever back and release the cam.

CAUTION

Check park brake is OFF prior to landing.

7.16 ELECTRICAL SYSTEM

The J160-C has a 12 volt electrical system consisting of a 12 volt battery, starter motor, regulator, alternator with a nominal 14 volt output, electric flap, electric fuel boost pump, circuit breakers, oil temperature gauge, optional strobe lights, switches and related wiring. The electrical system is constructed as a dual bus system. An instrument bus, powered from the main bus, powers the instruments and radios. The master bus powers all other electrical systems in addition to the instrument bus.

The master switch (mounted on the lower left hand side of the instrument panel) controls power to the main bus. Another switch controls the connection between the main bus and the instrument bus. The Master bus connects with the battery. The feed from the alternator goes to the battery, which acts as a filter, reducing noise in the bus system. All other switches are located along the lower left side of the panel. The circuit breakers are fitted along the lower right side of the instrument panel.

A warning light connected to the regulator illuminates to provide an indication should the alternator cease charging. The regulator delivers a regulated nominal 14 volts to the aircraft battery. Refer to Figure 7.15 and 7.16b for a simplified schematic of the electrical system.

NOTE

The master switches are not switch breakers and their circuits are protected by circuit breakers found in the lower right side of the instrument panel.

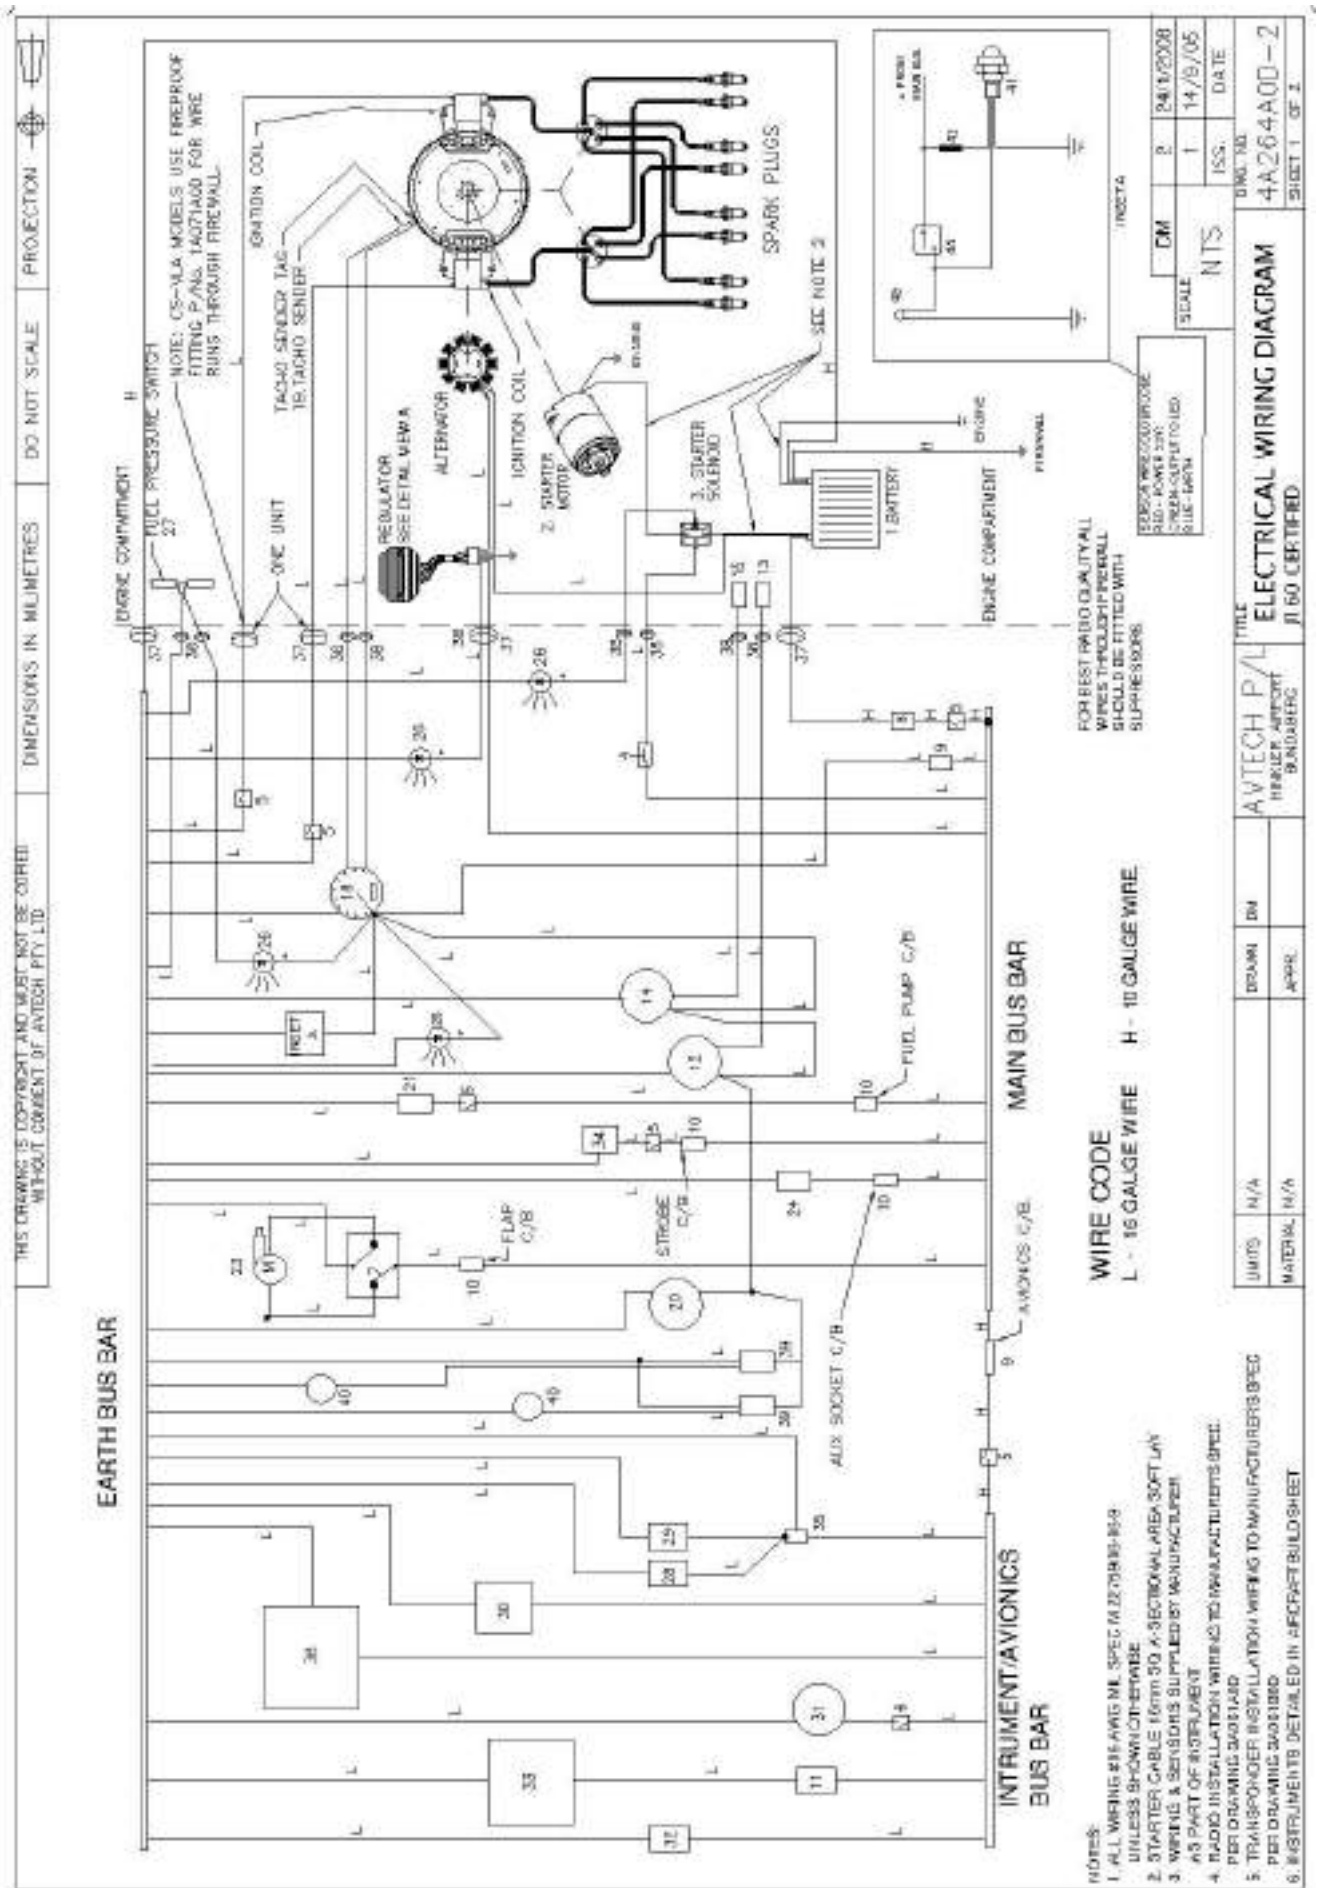


Figure 7.15 – Electrical System Sheet 1.

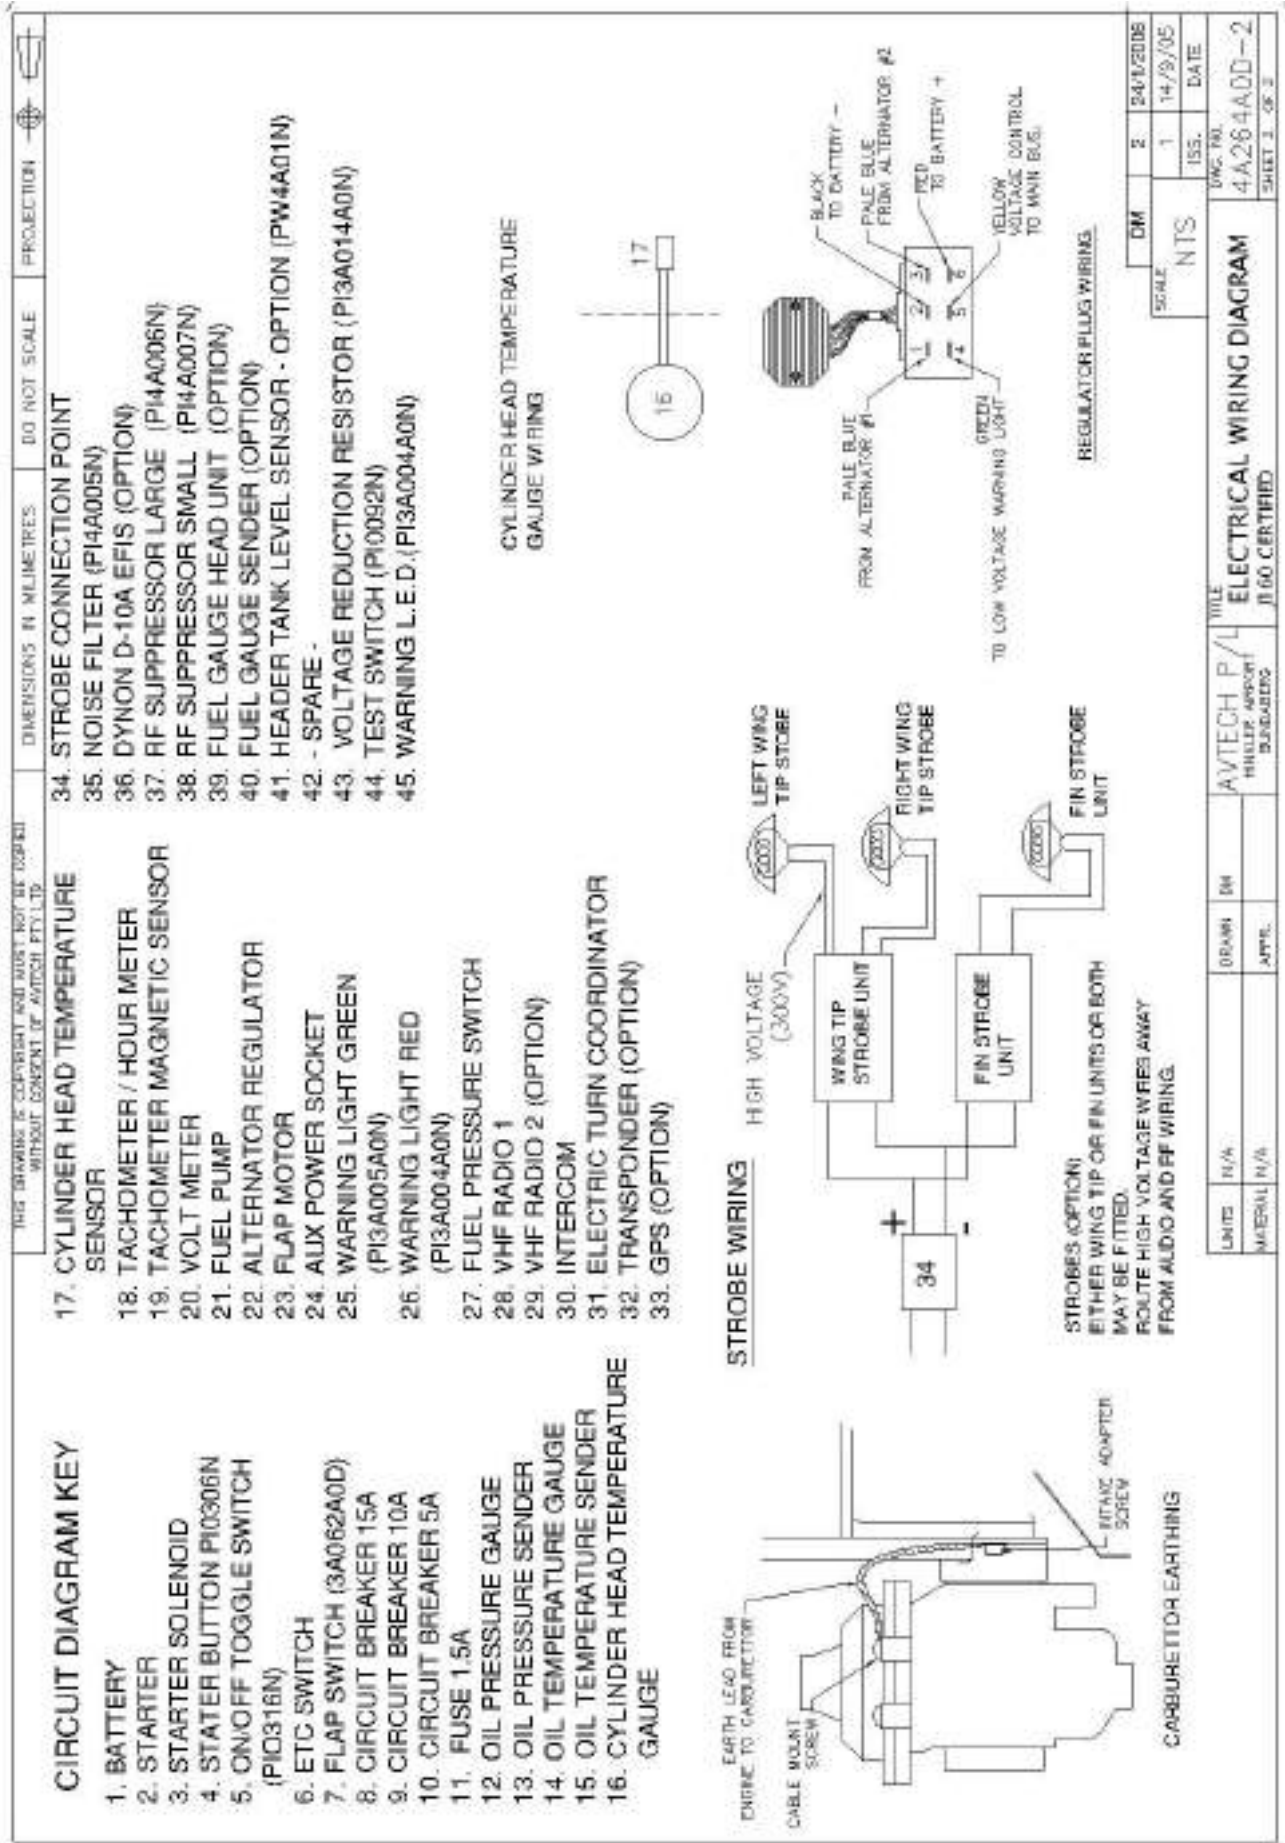


Figure 7.16b – Wiring Diagram Sheet 2.



7.17 COCKPIT VENTILATION

Ventilation air is provided by vents located beside the rudder pedals. The volume of the air supply can be regulated by sliding the vent shutters as desired using your foot.

7.18 PITOT-STATIC SYSTEM AND INSTRUMENTS

The pitot-static system supplies ram air pressure to the airspeed indicator and static pressure to the airspeed indicator and the altimeter. The system is composed of a Pitot probe mounted on the right wing strut.

7.18.1 Airspeed Indicator

The airspeed indicator is calibrated in knots. Limitations and range markings (in KIAS) are incorporated on the instrument as specified in Section 2 sub-section 2.3.

7.18.2 Altimeter

Aircraft altitude is depicted by a barometric type altimeter. A knob near the lower left portion of the altimeter allows the ambient barometric pressure sub-scale to be adjusted to the current value. This sub-scale has a dual calibration of millibars (mb) and inches of Mercury (in Hg).

7.18.3 Vertical Speed Indicator

The vertical speed indicator indicates the aircraft's rate of climb or descent in feet per minute. The pointer is actuated by changes in ambient barometric pressure as sensed by the static source.

7.19 STALL WARNING SYSTEM

The aircraft is equipped with an air operated artificial stall warning system. A vent is located on the leading edge of the left wing with a small lip protruding below. As the aircraft approaches the stall the angle of the airflow flowing past the lip produces a suction in the vent which sucks air through a reed "squawker" located in the wing root area of the cabin. The "squawker" produces an audible note which increases in volume as the stall deepens. The speed at which the warning activates is adjusted by changing the height of the lip below the vent on the wing, and is set to go off 5-10 knots below the stall. The system will operate reliably in any loading condition or flap setting.

7.20 AVIONICS

The aircraft may be fitted with a variety of avionics equipment. Refer to Section 9 for information on the avionics fitted to each aircraft.

All avionic services are powered from the instrument bus that is energised by turning ON the Master and Instrument Switches on the instrument panel.



This Page is intentionally left blank



SECTION 8

HANDLING, SERVICE & MAINTENANCE

TABLE OF CONTENTS

Paragraph		Page
8.1	INTRODUCTION.....	8-2
8.2	IDENTIFICATION PLATE.....	8-2
8.3	AIRCRAFT DOCUMENTS.....	8-2
8.4	AIRCRAFT INSPECTION, MAINTENANCE & REPAIR.....	8-3
8.4.1	MANDATORY INSPECTION AND MAINTENANCE.....	8-3
8.4.2	PREVENTATIVE MAINT. & MINOR FIELD REPAIR.....	8-3
8.4.3	FLUID SERVICING.....	8-4
8.4.4	WHEEL BRAKE SYSTEM.....	8-5
8.4.5	UNDERCARRIAGE.....	8-5
8.4.6	TYRES.....	8-5
8.4.7	INDUCTION AIR FILTER.....	8-6
8.4.8	BATTERY SERVICE.....	8-6
8.5	ALTERATIONS OR REPAIRS.....	8-6
8.6	GROUND HANDLING.....	8-6
8.6.1	PARKING.....	8-6
8.6.2	TIE DOWN.....	8-7
8.6.3	JACKING.....	8-7
8.6.4	LEVELLING.....	8-8
8.7	FLYABLE STORAGE.....	8-8
8.8	CLEANING AND SIMILAR CARE.....	8-8
8.8.1	Windshield and Windows.....	8-8
8.8.2	Painted Surfaces.....	8-9
8.8.3	Propeller Care.....	8-9
8.8.4	Engine Compartment.....	8-9



8.1 INTRODUCTION

This section contains factory recommended procedures for proper ground handling and routine care and servicing of your J160-C aircraft. It also identifies certain inspection and maintenance requirements that fall into two basic categories:

1. Mandatory Inspection and Maintenance Requirements
2. Recommended Preventative Maintenance and Minor Field Repairs

All inspections, maintenance, and repairs must be conducted in accordance with the applicable regulations in the country of registration of the aircraft. Regulations usually require that all **Mandatory Inspection and Maintenance Requirements** be carried out and certified for only by appropriately trained and licensed personnel, whereas, to the extent limited by the regulations, **Factory Recommended Preventative Maintenance and Minor Field Repairs** may be carried out by a suitably licensed pilot on an aircraft they own or operate.

8.2 IDENTIFICATION PLATE

All correspondence with the factory regarding your aircraft should include the **Serial Number**. This is the only identification recognised by the factory as it is possible that the aircraft registration and/or owner has changed since the aircraft was originally delivered. The Serial Number and Model Number can be found on a fireproof identification plate located on the left hand side of the tail fin where the fin attaches to the fuselage.

8.3 AIRCRAFT DOCUMENTS

The following documents are supplied with the aircraft when delivered from the factory:

- < PILOT'S OPERATING HANDBOOK & APPROVED FLIGHT MANUAL
- < JABIRU AIRCRAFT 2200 ENGINE MAINTENANCE & INSTRUCTION MANUAL
- < JABIRU AIRCRAFT 2200 ENGINE INSTALLATION MANUAL
- < PROPELLER TECHNICAL MANUAL
- < AIRFRAME LOG BOOK
- < ENGINE LOG BOOK
- < PROPELLER LOG BOOK
- < JABIRU J160-C TECHNICAL MANUAL (Includes Service & Maintenance Manual)



8.4 AIRCRAFT INSPECTION, MAINTENANCE & REPAIR

8.4.1 MANDATORY INSPECTION AND MAINTENANCE

Although the applicable regulations in the country of registration of the aircraft may vary the requirements somewhat, the aircraft will normally be required to undergo a mandatory annual/100 hourly inspection and maintenance in accordance with approved maintenance schedules. In addition some components, in particular the engine and it's accessories, will be subject to complete overhaul based on time in service.

Jabiru Aircraft recommend that all Mandatory Inspection and Maintenance Requirements be conducted in accordance with the details laid out in the Jabiru J160 Technical Manual.

From time to time other mandatory inspections may be required in the light of in service experience. In this event airworthiness directives relating to the airframe, engine, propeller or other components/equipment as appropriate will be issued. It is the responsibility of the owner/operator to ensure compliance with all applicable airworthiness directives and, when the inspections are repetitive, to take appropriate action to prevent inadvertent non-compliance.

All maintenance carried out must be correctly recorded and certified for in the relevant log books.

8.4.2 PREVENTATIVE MAINT. & MINOR FIELD REPAIR

Depending on the applicable regulations in the country of registration of the aircraft, limited maintenance and minor repairs may be carried out by a suitably licensed pilot on an aircraft they own or operate. Reference should be made to the relevant regulations to determine the specific maintenance operations that are authorised. Although the remainder of this section provides the majority of the information that should be required by the pilot to enable them to conduct limited maintenance and minor repairs, it is nevertheless desirable that a copy of the Jabiru J160 Technical Manual be available to the pilot to ensure that proper procedures are followed at all times or to provide additional details where required.

Where permitted by appropriate regulations, Jabiru Aircraft recommend the following preventative maintenance:

DAILY:

- a. Check fairings for loose screws.
- b. Carry out daily inspections as detailed in Section 4 of this manual.
- c. Ensure correct tyre pressures to prevent premature wear.

In addition to the preventative maintenance recommendations listed above, the pilot must always be diligent when carrying out their inspections and be prepared to rectify any defects found to the extent permitted by the appropriate regulations.



8.4.3 FLUID SERVICING

8.4.3.1 Fuel System

Filling Fuel Tanks

Observe all the required precautions for handling fuel and filling tanks. Ensure that the aircraft is bonded to Earth using the muffler tailpipe tip. Additionally, prior to opening the fuel cap the earth strap on the refuelling nozzle should be attached to the earthing point adjacent to the tank filler neck. Fill the tank to within 15 mm of the top of the tank. Note that when the each wing tank has more than approximately 50 litres inside, the fuel level will be above the top of the sight glass.

Fuel Draining/Sampling

Three quick fuel drain fittings are provided in the J160 fuel system. There is one for each main fuel tank and these are located in the wing-root area on the lower wing surface, The drain for the header tank is located on the belly of the fuselage aft of the main undercarriage and is most easily accessed from the right hand side of the aircraft.

Fuel should be drained/sampled from all of these points before the first flight of the day and after each subsequent refuelling.

Draining Fuel System

The complete fuel system may be drained by the using the fuel drain points.

8.4.3.2 Engine Lubrication System

Filling the Engine Sump

The engine sump should be filled to the operating level with the lubricating oil specified in Section 2. This may be accomplished by using a suitable funnel inserted in the oil filler tube located on the top of the engine. An access cover is provided in the engine cowl for this purpose.

Draining the Sump

The engine sump is drained by removing the lower engine cowl and removing the sump drain plug. Ensure that the sump plug is correctly replaced **and lock wired** prior to refilling the engine with oil. Do not remove hoses to drain the oil cooler during a normal oil change. After replacing oil, turn the engine over on the starter with the ignitions OFF until oil pressure registers before starting engine.



8.4.4 WHEEL BRAKE SYSTEM

Brake System

The brake system utilises a single master cylinder with an integral fluid reservoir. The brake callipers require periodic inspection to adjust the pad-disc clearances and check pad wear. If the brake pads show signs of excessive wear, they should be replaced.

Park Brake

The park brake is a mechanical lock applied to the brake handle. The park brake is actuated by applying the brakes, then engaging the locking cam on the brake handle. To release the brakes, pull the handle back and release the locking cam.

Filling Brake Cylinders

This is accomplished from inside the cockpit by removing the cap from the top of the reservoir and filling with DOT-3 automotive brake fluid. Ensure that no contaminants are allowed to enter the reservoir.

8.4.5 UNDERCARRIAGE

Because of its simplicity, the undercarriage does not require complicated maintenance. The main undercarriage leg requires no maintenance except for an occasional clean around the fairing to remove dirt, grime and grass and inspection of the brake hoses. The nose gear requires the leg to be clean for smooth operation. Bolts and bushes should be inspected regularly and if worn excessively, replaced.

8.4.6 TYRES

The tyres should be carefully checked for correct inflation, cuts, abrasions, wear, slippage and other obvious defects and replaced if necessary. After removing the wheels from the aircraft, the tyres may be demounted by deflating the tubes, then removing the wheel through-bolts, allowing the wheel halves to be separated.

WARNING

Removal of the wheel through-bolts without first deflating the tube may result in death or injury.

The recommended tyre inflation pressures are:

MAIN WHEELS	214-228 kPa (31-33 psi)
NOSE WHEEL	186-193 kPa (27-28 psi)



8.4.7 INDUCTION AIR FILTER

Dust and dirt must be prevented from entering the engine induction system. Dust and dirt ingested into the engine is probably the greatest single cause of premature engine wear. *The value of maintaining the air filter in good clean condition cannot be overstressed.*

Visual Inspection

A visual inspection of the paper cartridge should be made at intervals of approximately 50 flying hours. Under extreme conditions, daily cleaning with compressed air may be necessary. During inspections, the cartridge must be checked to see if it has been dislodged or damaged or is suffering an excessive build up of debris.

Cleaning

To some extent, the cartridge can be blown out using clean compressed air, however periodic replacement, depending on condition, is required.

8.4.8 BATTERY SERVICE

The J160 must be fitted with a "no maintenance" 12 volt, PC625 Odyssey Sealed Lead Acid Battery (Jabiru P/No. PM0095N).

The battery is located inside the engine bay. Access is gained by removing the top cowl.

WARNING

Do not perform any maintenance on the electrical system in conjunction with work on the fuel system. The escape of fuel fumes under the floor and/or in the aircraft may cause an explosion.

As the name implies, the "no maintenance" battery requires no routine maintenance other than to check its security occasionally and to clean the terminals if required.

8.5 ALTERATIONS OR REPAIRS

All alterations and repairs to this J160-C aircraft must be done using data which is approved by the NAA.

8.6 GROUND HANDLING

The aircraft can be easily manoeuvred on level ground by one person. The inner 6" of the propeller blades and the inner foot of the horizontal tail are the places best suited to hold during ground handling. **Never hold the propeller while the master switch is on or there is a person in the cockpit.** Additional persons can assist by pushing or pulling on the main wing struts. In congested areas, wing and/or tail walkers should be positioned to ensure adequate clearance from stationary objects.

8.6.1 PARKING

When possible park the aircraft into the anticipated wind and set the parking brake. Do not set the parking brake when they are very hot. Lock the controls using the lower portion of the pilot's restraint harness around the control column to secure it. Install wheel chocks when available.



When severe weather conditions or high winds are anticipated, the best precaution is to hangar the aircraft. In less severe conditions, or when hangarage is not available the aircraft should be tied down as outlined in the following paragraph.

8.6.2 TIE DOWN

The following procedure should be used to tie-down the aircraft:

- a. Lock the ailerons and elevator as described above or by using suitable locally manufactured external control surface locks.
- b. Chock the wheels.
- c. Attach a suitably strong (recommended 550 kg tensile strength) tie-down rope to the wing tie-down rings at approximately 45 degrees to the ground. Leave sufficient slack to avoid damage due to rope shrinkage that may occur when a moist rope dries out.
- d. Attach a suitably strong (recommended 550 kg tensile strength) tie down rope to the tail tie-down at approximately 45 degrees to the ground. Leave sufficient slack to avoid damage due to rope shrinkage that may occur when a moist rope dries out.

8.6.3 JACKING

The aircraft may be jacked in order to service the landing gear, change wheels/tyres and to perform other service functions. The procedure for jacking the aircraft is as follows:

Nose Wheel:

- a. Place a rag on the top of the horizontal stabiliser immediately beside the fuselage to protect the paint. Place a soft container (such as a bag) containing approximately 20kg of lead shot on the tail and ease it to rest on the ground.

Main Wheel:

- a. Lifting from the wingtip, lift the wheel clear of the ground.
- c. Use a wing stand to hold the wheel off the ground. Note that if a wing stand is not available, a brick or similar may be placed under the bottom end of the undercarriage leg to hold the wheel clear of the ground while the wheel is fixed.

CAUTION

Always take care when working on an aircraft on jacks. Ensure the stands are not bumped and that the aircraft's CG is not altered significantly (such as by a person entering the cabin).



8.6.4 LEVELLING

The aircraft is longitudinally level when an accurate level placed on the lower section of the pilot's side door frame gives a level indication.

The aircraft is laterally level when an accurate level placed between the upper engine mount attachments gives a level indication.

8.7 FLYABLE STORAGE

Aircraft in non-operational storage, for a maximum of 30 days, are considered to be in flyable storage status. Every seventh day during these periods, the propeller should be rotated by hand through five revolutions. This action "limbers" the oil and prevents any accumulation of corrosion on engine cylinder walls. An aircraft being parked in flyable storage should have the engine stopped by turning off the fuel valve, ensuring there is no fuel left in the carburettor bowl.

WARNING

For maximum safety, check that both ignitions are OFF, the throttle closed and the aircraft is secured before rotating the propeller by hand. Do not stand within the arc of the propeller blades while turning the propeller.

After 30 days, the aircraft should preferably be flown for 30 minutes. As well as helping to avoid engine problems, this also helps to reduce accumulations of water in the fuel system, tops up the battery charge, and exercises the other aircraft systems. If it is not possible to fly the aircraft a ground run up should be made just long enough to produce an oil temperature within the lower green arc range. Excessive ground run up should be avoided.

If the aircraft is to be out of service for long periods, refer to the J160 TECHNICAL MANUAL for proper storage procedures.

8.8 CLEANING AND SIMILAR CARE

8.8.1 Windshield and Windows

The windshield and windows are made from a plastic material and consequently a certain amount of care is required to keep them clean. The following procedure is recommended:

1. Flush with clean water to remove excess dirt, bugs and other loose particles.
2. Wash with a mild soap and warm water. Use a soft cloth or sponge. Do not rub excessively.
3. Rinse thoroughly, then dry with a clean moist chamois. Do not rub with a dry cloth as this builds up an electrostatic charge which attracts dust. Oil and grease may be removed by rubbing lightly with a soft cloth moistened with kerosene. **Do not use volatile solvents** such as acetone, gasoline, alcohol, benzene, carbon tetrachloride, lacquer thinner or most commercial window cleaning sprays, as they will soften and craze the plastic.



8.8.2 Painted Surfaces

The painted exterior surfaces of the aircraft can be washed using a mild detergent and water. Special aircraft cleaning detergents may be used or alternatively an automotive liquid detergent provided it is non-corrosive and contains no abrasive materials. Stubborn oil and grease may be removed using a small amount of solvent such as kerosene.

CAUTION

Do Not use silicone based cleaning products as they may be adsorbed by the composite structure and affect reparability.

8.8.3 Propeller Care

Preflight inspection of propeller blades for nicks, and wiping them occasionally with a damp cloth to clean off grass and bug stains will ensure long and trouble free service. If a nick occurs which exposes an edge of the urethane or fibreglass the edge should be sealed using a small amount of superglue to prevent air pressure from lifting the edge off the propeller body. Take care when using superglue to apply the minimum amount required and to avoid leaving lumps etc which may affect airflow over the blade.

8.8.4 Engine Compartment

The engine compartment should be kept clean to minimise any danger of fire, and to allow proper inspection of engine components. The engine and engine compartment may be washed down with a suitable solvent, then dried thoroughly.

CAUTION

Particular care should be given to electrical equipment before cleaning. Solvent should not be allowed to enter starter, alternator, and the like. These components should not be saturated with solvent. Any oil, fuel, and air openings on the engine and accessories should be covered before washing the engine with solvent. Caustic cleaning solutions should be used cautiously and should always be properly neutralised after their use.



This Page Intentionally Left Blank



SECTION 9

SUPPLEMENTS

TABLE OF CONTENTS

Paragraph	Page
9.1 INTRODUCTION	9-1
9.2 LOG OF SUPPLEMENTS – JABIRU AIRCRAFT SUPPLEMENTS	9-2

9.1 INTRODUCTION

This section consists of a series of supplements, each being self contained and providing details and procedures associated with the fitment of optional and special purpose equipment.

Each supplement contains a brief description, and where applicable, operating limitations, emergency and normal procedures, and the effect on aircraft performance. The data contained in a supplement adds to, supersedes, or replaces similar data in the basic POH when operating in accordance with the provisions of that supplement.

The Log of Supplements shows the CASA Approved Jabiru Aircraft Supplements available for the J160-C at the date of publication of this POH. The Log of Supplements page can be utilised as a Table of Contents for this section. A check mark (✓) in the Install column indicates that the corresponding supplement is incorporated in the POH.

It is the owner's responsibility to ensure that new Jabiru Aircraft Supplements received after receipt of the POH are recorded on the Log of Supplements page.

In the event that the aircraft is modified at a non Jabiru Aircraft facility through an STC or other approval method, it is the owner's responsibility to ensure that the proper supplement, if applicable, is installed in the handbook and the supplement is properly recorded on the Log of Supplements page as amended from time to time.



9.2 LOG OF SUPPLEMENTS – JABIRU AIRCRAFT SUPPLEMENTS

Applicable to aircraft serial number J160-C _____

Install	Doc. No.	Title	Date